



ECON® Y-filter Type: 1010 Cast iron Internal thread (BSPP)

Characteristics

Type: 1010

Application


- Gases, water, oil and other process fluids

Technical Information

- Horizontal piping
- Vertical piping with downwards flow
- Max. differential pressure 1bar
- Suitable for suction and delivery piping

Options

- Available with other perforations

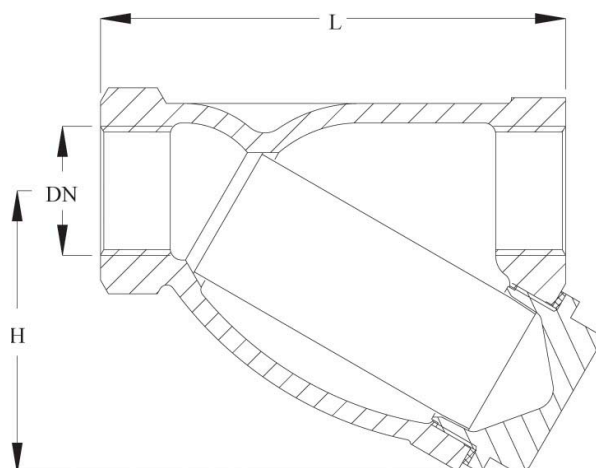

Size table:

DN	H	L	Diameter screen	Height screen	Weight
	mm	mm	mm	mm	kg
3/8" [10]	45	72	18	50	0.3
1/2" [15]	52	85	23	56	0.5
3/4" [20]	62	100	28	68	0.8
1" [25]	73	120	36	82	1.1
1.1/4" [32]	86	140	42	98	1.9
1.1/2" [40]	98	160	50	114	2.5
2" [50]	144	205	60	154	6.1
2.1/2" [65]	172	245	76	187	8.5
3" [80]	186	265	83	200	12

Pressure rating

PN10

Maximum medium temperature

200°C

Material quality	Nominal inner diameter	Standard thread connection	Pressure rating	Face to Face length	Perforation size	With measuring connections	Cover model	With drain plug	Material cover	Article
				mm	mm					
EN-JL1040	3/8" [10]	ISO 228-1	PN10	72	0.6	No	Screwed			13263329
EN-JL1040	1/2" [15]	ISO 228-1	PN10	85	1	No	Screwed	No	CW617N	11811868
EN-JL1040	3/4" [20]	ISO 228-1	PN10	100	1	No	Screwed	No	CW617N	11811869
EN-JL1040	1" [25]	ISO 228-1	PN10	120	0.5	No	Screwed			13487509
EN-JL1040	1" [25]	ISO 228-1	PN10	120	1	No	Screwed	No	CW617N	11811865
EN-JL1040	1.1/4" [32]	ISO 228-1	PN10	140	1	No	Screwed	No	CW617N	11811871
EN-JL1040	1.1/4" [32]	ISO 228-1	PN16	140	0.6	No	Screwed			13494430
EN-JL1040	1.1/2" [40]	ISO 228-1	PN10	160	1	No	Screwed	No	CW617N	11811870

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Material quality	Nominal inner diameter	Standard thread connection	Pressure rating	Face to Face length	Perforation size	With measuring connections	Cover model	With drain plug	Material cover	Article
				mm	mm					
EN-JL1040	2" [50]	ISO 228-1	PN10	205	1	No	Flanged	No	EN-JL1040	11811866
EN-JL1040	2.1/2" [65]	ISO 228-1	PN10	245	1.25	No	Screwed	No	CW617N	12341016
EN-JL1040	3" [80]	ISO 228-1	PN10	265	1.25	No	Flanged	No	EN-JL1040	11811867

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.