



## ASAHI Diaphragm valve Series: 14 Type: 3760 PVC-U Flange PN10

### Characteristics

**Series:** 14

**Type:** 3760

**Housing construction:** A (Weir type)

**Housing material:** PVC-U

**Connection:** Flange

**Face to Face norm:** EN 558, Series 1


**Manual operation:** Hand wheel

### Application

- Recommended in: Chemical

### Size table:

DN	A	L	H	M	Weight
	mm	mm	mm	mm	kg
DN15	95	130	104	100	0.7
DN20	105	150	88	100	0.8
DN25	115	160	111	100	1.1
DN32	135	180	116	100	1.4
DN40	150	200	177	156	2.8
DN50	158	230	191	156	3.6
DN65	185	290	266	220	5.6
DN80	200	310	280	220	7.4
DN100	220	350	329	257	11.5

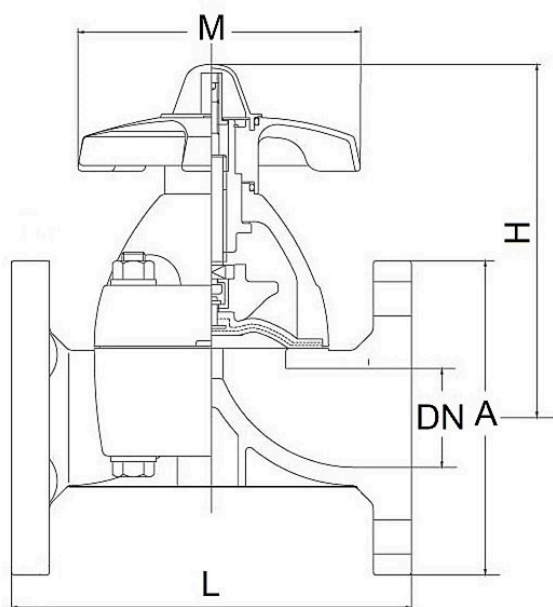

Membrane material	External tube diameter of connection	Nominal inner diameter	Pressure rating	Face to Face length	Material bonnet	Actuator material	Minimum medium temperature [continuous]	Maximum medium temperature [continuous]	Kv value	Article
	mm			mm			°C	°C	m³/h	
EPDM	20	DN15	PN10	130	PVC-U	PP	0	60	4.1	12478683
EPDM	25	DN20	PN10	150	PVC-U	PP	0	60	4.6	12478684
EPDM	32	DN25	PN10	160	PVC-U	PP	0	60	7.3	12478685
EPDM	40	DN32	PN10	180	PVC-U	PP	0	60	9.5	12478686
EPDM	50	DN40	PN10	200	PVC-U	PP	0	60	22.5	12478687
EPDM	63	DN50	PN10	230	PVC-U	PP	0	60	37.2	12478688
EPDM	75	DN65	PN10	290	PVC-U	PP	0	60	73.4	12478689
EPDM	90	DN80	PN10	310	PVC-U	PP	0	60	99.4	12478690
EPDM	110	DN100	PN10	350	PVC-U	PP	0	60	159.8	12478691
PTFE	20	DN15	PN10	130	PVC-U	PP	0	60	4.1	12478692

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

## Diaphragm Valves | Diaphragm Valves with Flange Connection

Membrane material	External tube diameter of connection	Nominal inner diameter	Pressure rating	Face to Face length	Material bonnet	Actuator material	Minimum medium temperature (continuous)	Maximum medium temperature (continuous)	Kv value	Article
	mm			mm			°C	°C	m <sup>3</sup> /h	
PTFE	25	DN20	PN10	150	PVC-U	PP	0	60	4.6	12478693
PTFE	32	DN25	PN10	160	PVC-U	PP	0	60	7.3	12478694
PTFE	40	DN32	PN10	180	PVC-U	PP	0	60	9.5	12478695
PTFE	50	DN40	PN10	200	PVC-U	PP	0	60	22.5	12478696
PTFE	63	DN50	PN10	230	PVC-U	PP	0	60	37.2	12478697
PTFE	75	DN65	PN10	290	PVC-U	PP	0	60	73.4	12478698
PTFE	90	DN80	PN10	310	PVC-U	PP	0	60	99.4	12478699
PTFE	110	DN100	PN10	350	PVC-U	PP	0	60	159.8	12478700

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.