

BERLUTO Float valve Type: 8732 Stainless steel External thread (BSPP)



Characteristics

Series: SV 45

Type: 8732

Housing material: Stainless steel

Connection: External thread (BSPP)

Connection 2: Internal thread (BSPP)

Pressure rating: PN12

Sealing: FPM (FKM)

Material floating rod: 1.4404

Minimum medium temperature (continuous): 0 °C

Maximum medium temperature (continuous): 190 °C

Application

- Water
- Neutral liquids
- Level control of water supply tanks, small tanks, reservoirs, poultry drinking troughs, humidification systems, pond systems, steam generation systems.

Technical Information


- Adjustable float ball position.
- Float ball in copper or plastic.

Options

- Float rod with special length on request.

Size table:

G	G1	L	L1
		mm	mm
3/8" [10]	3/8" [10]	398	30
1/2" [15]	1/2" [15]	398	30
3/4" [20]	3/4" [20]	398	30

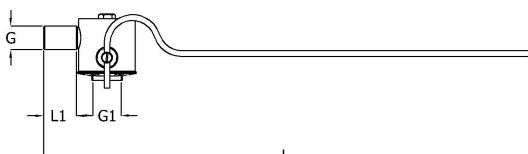

Nominal inner diameter	Nominal inner diameter 2	With float	Float diameter	Float material	Kv value	Article
			mm		m ³ /h	
3/8" [10]	3/8" [10]	No			0.3	14683595
3/8" [10]	3/8" [10]	Yes	95	Stainless steel	0.3	14684440
3/8" [10]	3/8" [10]	Yes	90	Plastic	0.3	14684485
1/2" [15]	1/2" [15]	Yes	90	Plastic	0.3	14684486
1/2" [15]	1/2" [15]	No			0.3	14683596
1/2" [15]	1/2" [15]	Yes	95	Stainless steel	0.3	14684441
3/4" [20]	3/4" [20]	No			0.3	14683597
3/4" [20]	3/4" [20]	Yes	90	Plastic	0.3	14684487
3/4" [20]	3/4" [20]	Yes	95	Stainless steel	0.3	14684442

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.