



ECON® Glass tube thermometer fig. 1656 plastic insertion angle 90° medium size model

Characteristics

Type: 1656

Model: Medium (150 mm)

Construction type: Angle pattern

Connection location: Back


Process connection: External thread

Housing material: Plastic

Max. operating pressure: 16 bar

Application

- Recommended in: Machine Construction, Utilities

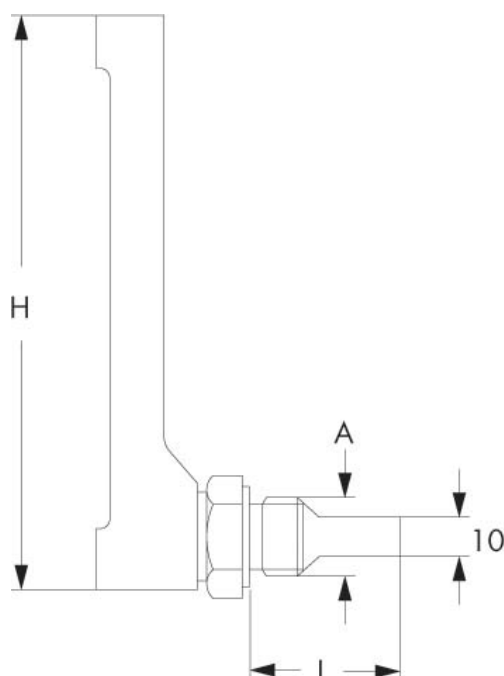

Size table:

L	G	H
mm		mm
50 - 63 - 100	1/2"	150

Measuring range	Size process connection	Insert length	Process connection material	TMA - maximum allowable temperature	Article
°C		mm		°C	
-30 / 50	1/2" BSPP(G)	50	Brass	50	EC01656CBBCLA21
-30 / 50	1/2" BSPP(G)	63	Brass	50	EC01656DBBCLA21
-30 / 50	1/2" BSPP(G)	100	Brass	50	EC01656GBBCLA21
0 / 120	1/2" BSPP(G)	63	Brass	120	EC01656DBBFLA21

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.