





ECON® Bourdon tube pressure gauge Type: 347 Lower mount Brass Direct

Characteristics

Type: 347
Model: Control manometer
Blow-out included: No
Liquid-damped: No
Fill fluid: None
Pressure gauge attachment: Direct
Connection location: Lower mount
Process connection: External thread

Characteristics [2]

Process connection material: Brass
Protection class: IP54
Medium temperature: 0 / 80 °C
Ambient temperature: -20 / 60 °C

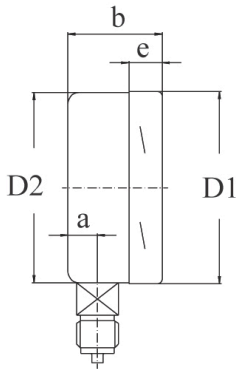

Size table:

Cabinet diameter	G	a	b	D1	D2	e	h	SW
		mm	mm	mm	mm	mm	mm	mm
R160	1/2"	17.5	49.5	161	159	17.5	118	22

Cabinet diameter	G	D1	D2	b	e	a	sw	h
mm	BSPP	mm	mm	mm	mm	mm	mm	BSP
R160	1/2"	161	159	49.5	17.5	15.5	22	118

Cabinet diameter	Measuring range	Pressure unit	Accuracy class	Size process connection	Cabinet material	Window material	Material dial	Maximum overpressure	Article
mm								bar	
160	0 / 16	bar	0.6 %	1/2" BSPP[G]	Stainless steel 304	Glass	Aluminium	20	EC003471H1A1110

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.