

ECON® Fire fighting valve Type: 2057 Bronze Inclined Flange

Characteristics

Type: 2057
Construction type: Inclined
Housing material: Bronze
Material quality: CC491K [RG5]
Surface protection: Standard manufacturers coating
Connection: Flange
Connection 2: Storz coupling
Flange finish: Flat face
Operation: Hand wheel, non-rising with non-rising stem
Type of bonnet: Flanged
Colour: Red, RAL3000
Spindle material: Chromium steel
Primary spindle seal material: EPDM

Material bonnet: CC491K [RG5]

Bonnet gasket material: EPDM

Material storz coupling: Brass

Actuator material: EN-JL1030


Minimum medium temperature (continuous): -10 °C

Maximum medium temperature (continuous): 80 °C

Maximum pressure difference at 20 °C: 10 bar

Application

- Recommended in: Utilities

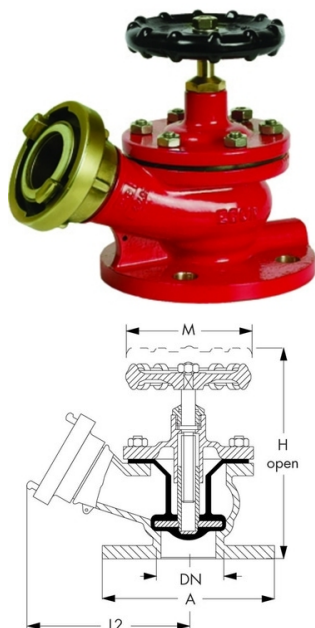

DN	A	L2	H (open)	M	Lug distance	Weight
mm	mm	mm	mm	mm	mm	kg
40	150	145	190	120	51	7.1
50	165	160	190	120	66	8.2
65	185	190	220	140	81	11.4

Pressure class	Maximum medium temperature
PN10	80 °C

Norm	Nominal inner diameter	Lug distance	Pressure rating	Face to Face length	Sealing	Article
		mm		mm		
EN (DIN)	DN40	66	PN10	888888	EPDM	13501989
EN (DIN)	DN50	66	PN10	888888	EPDM	11812762
EN (DIN)	DN65	81	PN10	888888	EPDM	11812763

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.