



VOSS Flared Cone BV10CO

- Flared Cone
- Series L and S
- Material: steel, blackened and oiled
- O-ring NBR


Characteristics

Material: Steel


O-ring material: NBR

Size table:

Load class (DIN 2353)	Suitable for pipe diameter 2	d3	d4	l1
	mm	mm	mm	mm
L	6x1	2.9	4.2	16.5
L	8x1	4.9	6.2	18.6
L	10x1	6.3	8.2	19
L	10x1.5	5.5	7.2	19
L	12x1	8	10.2	21.5
L	12x1.5	7.5	9.2	21.5
L	15x1.5	10.2	12.2	21.5
L	15x2	9.1	11.3	21.5
L	18x1.5	13	15.2	22
L	18x2	12	14.3	22
L	22x1.5	16.2	19.2	23.5
L	22x2	16.2	18.3	23.5
L	28x2	21	24.3	27
L	28x3	19.5	22.3	27
L	35x2	28.5	31.3	31
L	35x3	26.5	29.3	31
L	42x3	33.5	36.3	31
S	8x1.5	4	5.2	20
S	8x2	3	4.2	20
S	10x1.5	5.5	7.2	21
S	10x2	4.5	6.2	21
S	12x1.5	7.5	9.2	22.5
S	12x2	6.5	8.2	22.5
S	12x3	4.5	6.2	22.5
S	14x2	8.5	10.3	26
S	16x2	10.5	12.3	26.5
S	16x2.5	9.5	11.3	26.5

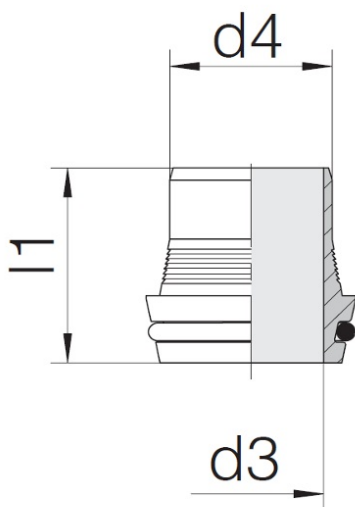

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

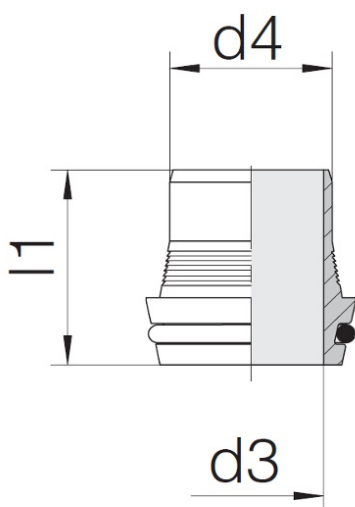

Size table:

Load class [DIN 2353]	Suitable for pipe diameter 2	d3	d4	l1
S	16x3	8.5	10.3	26.5
S	20x2	13.5	16.3	32
S	20x2.5	13.5	15.3	32
S	20x3	12.5	14.3	32
S	20x3.5	11	13.3	32
S	20x4	10	12.3	32
S	25x2.5	18	20.3	34.5
S	25x3	17	19.3	34.5
S	25x4	15	17.3	34.5
S	30x3	22	24.3	34.5
S	30x4	20	22.3	34.5
S	30x5	17	20.3	34.5
S	38x3	30	32.3	38
S	38x4	27	30.3	38
S	38x5	26	28.3	38
S	38x6	23	26.3	38

Load class [DIN 2353]	Suitable for pipe diameter 2 mm	Nominal pressure	Article
L	6x1	PN500	11452625
L	8x1	PN500	11452627
L	10x1	PN500	606081
L	10x1.5	PN500	11452629
L	12x1	PN400	11452631
L	12x1.5	PN400	606138
L	15x1.5	PN400	11452633
L	15x2	PN400	821470
L	18x1.5	PN400	606162
L	18x2	PN400	11452635
L	22x1.5	PN250	11452637
L	22x2	PN250	606197
L	28x2	PN250	11452639
L	28x3	PN250	606227
L	35x2	PN250	11452641
L	35x3	PN250	11452643
L	42x3	PN250	606294
S	8x1.5	PN800	11397788
S	8x2	PN800	11452645
S	10x1.5	PN800	606359
S	10x2	PN800	835641
S	12x1.5	PN630	11452647
S	12x2	PN630	606383
S	12x3	PN630	11452649
S	14x2	PN630	11452651
S	16x2	PN630	606413
S	16x2.5	PN630	11452653

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Load class (DIN 2353)	Suitable for pipe diameter 2 mm	Nominal pressure	Article
S	16x3	PN630	606456
S	20x2	PN420	808326
S	20x2.5	PN420	606480
S	20x3	PN420	835501
S	20x3.5	PN420	11452656
S	20x4	PN420	11452664
S	25x2.5	PN420	11452658
S	25x3	PN420	606510
S	25x4	PN420	763667
S	30x3	PN420	606545
S	30x4	PN420	928887
S	30x5	PN420	11452660
S	38x3	PN420	11452662
S	38x4	PN420	606588
S	38x5	PN420	606626
S	38x6	PN420	11452663

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.