




ASAHI Butterfly valve Series: 57 Type: 3743 PP/PVDF Handle Wafer type

Characteristics

Series: 57
Type: 3743
Norm: EN (DIN)
Valve design: Centric
Housing material: PP
Connection: Wafer type
Face to Face norm: Manufacturer standard
Operation: Handle
Housing lining: Not replaceable
Disk material: PVDF
Primary spindle seal material: FKM-F
Actuator material: Plastic

Application

- Recommended in: Chemical

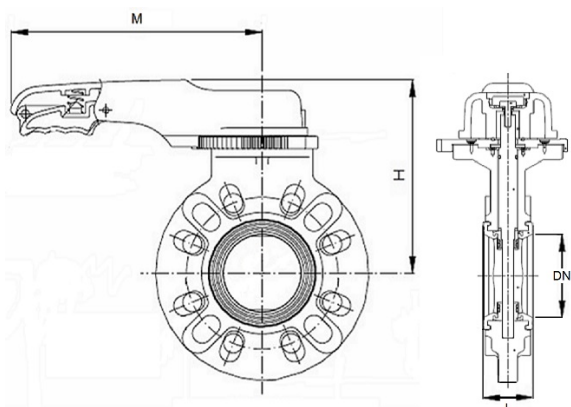

Size table:

DN	H mm	L mm	M mm	Weight kg
DN40	156	39	220	1.1
DN50	166	42	220	1.2
DN65	176	46	220	1.4
DN80	191	46	250	1.6
DN100	206	56	250	2
DN125	237	66	320	4
DN150	252	71	320	4.6
DN200	283	87	400	7.4

Nominal inner diameter	Pressure rating	Pressure rating flange	Face to Face length mm	Material liner	Spindle material	Quality class spindle	Minimum medium temperature (continuous) °C	Maximum medium temperature (continuous) °C	Article
DN40	PN10	PN10	39	FKM-F	Stainless steel	1.4401	-20	120	12478914
DN50	PN10	PN10	42	FKM-F	Stainless steel	1.4401	-20	120	12478915
DN65	PN10	PN10	46	FKM-F	Stainless steel	1.4401	-20	120	12478916
DN80	PN10	PN10	46	FKM-F	Stainless steel	1.4401	-20	120	12478917
DN100	PN10	PN10	56	FKM-F	Stainless steel	1.4401	-20	120	12478918
DN125	PN10	PN10	66	FKM-F	Stainless steel	1.4401	-20	120	12478919
DN150	PN10	PN10	71	FKM-F	Stainless steel	1.4401	-20	120	12478920
DN200	PN10	PN10	87	FKM-F	Stainless steel	1.4401	-20	120	12478921

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.