

CHEMVALVE-SCHMID Wafer type check valve Series: PrimeNozzle CSL Type: 632 Stainless steel Wafer type PN40

Stainless steel wafer type check valve with streamline disc and spring, pressure class PN40.



Characteristics

Series: PrimeNozzle CSL

Type: 632

Norm: EN (DIN)

Housing material: Stainless steel

Material quality: 1.4408

Connection: Wafer type

Face to Face norm: EN 558, Series 52

With spring: Yes

Minimum medium temperature (continuous): -10 °C

Maximum medium temperature (continuous): 300 °C

Maximum pressure difference at 20 °C: 52 bar

Application

- General industry.
- Utility applications (HVAC).
- Corrosive and neutral liquids and gases.
- Steam and oil.
- Suitable for horizontal and vertical (rising flow) mounting.

Technical Information


- Low flow resistance due to streamline disc.
- Mounting between flanges: PN10, 16, 25, 40, Class 150 or Class 300.
- Face to Face length: EN 558, Series 52.
- Testing: EN 12266-1.
- Leakage Class EN 12266-1: with metal seal Class C, with PTFE seal Class D, and with EPDM, NBR or FKM seal Class A.
- Information on opening pressures on request.

Options

- Available with flat disc steel; type 72619 (Face to Face length EN 558, series 49 instead of series 52).
- Available in special materials such as Duplex, Titanium or Hastelloy.
- Available with soft seal: EPDM, NBR, FKM or PTFE.
- Available in larger sizes.
- Available in higher pressure class.
- Available for other flange pressure class.
- Available with a different opening pressure.
- Calculation of the correct size based on process flow data.

Size table:

DN	d1 mm	d2 mm	D1 mm	D2 mm	L mm	Weight kg
DN15 - 1/2"	16.5	18.1	46.6	61	25	0.3
DN20 - 3/4"	22	23	57.2	77	31.5	0.5
DN25 - 1"	25.6	27.7	66.7	77	35.5	0.6
DN40 - 1.1/2"	41	41	85.7	98.5	45	1.4
DN50 - 2"	52	52	104	116	56	2.2
DN65 - 2.1/2"	59.5	66	118	144	63	3.3
DN80 - 3"	75.7	82	134	154	71	4.8
DN100 - 4"	94.1	105	159	185	80	7

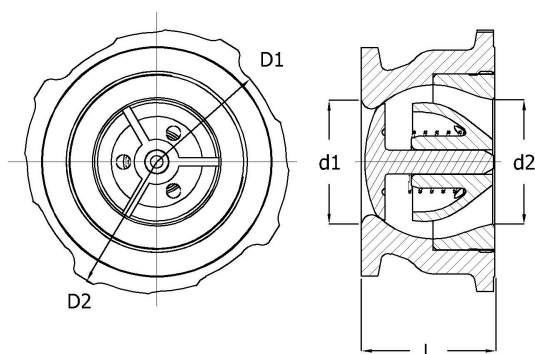

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Nominal inner diameter	Standard connection	Pressure rating	Pressure rating flange	Face to Face length	Valve shape	Kv value	Sealing	Material disc	Spring material	Article
				mm		m ³ /h				
DN15 - 1/2"	EN (DIN)/ASME	PN40	PN10/16/25/40 and Class 150/300	25	Streamline disc	5.5	Stainless steel	1.4408	1.4401	12986265
DN20 - 3/4"	EN (DIN)/ASME	PN40	PN10/16/25/40 and Class 150/300	31.5	Streamline disc	9.2	Stainless steel	1.4408	1.4401	12986266
DN25 - 1"	EN (DIN)/ASME	PN40	PN10/16/25/40 and Class 150/300	35.5	Streamline disc	12.6	Stainless steel	1.4408	1.4401	12986267
DN40 - 1.1/2"	EN (DIN)/ASME	PN40	PN10/16/25/40 and Class 150/300	45	Streamline disc	31	Stainless steel	1.4408	1.4401	12708466
DN50 - 2"	EN (DIN)/ASME	PN40	PN10/16/25/40 and Class 150/300	56	Streamline disc	48.3	Stainless steel	1.4408	1.4401	12708468
DN65 - 2.1/2"	EN (DIN)/ASME	PN40	PN10/16/25/40 and Class 150/300	63	Streamline disc	69.8	Stainless steel	1.4408	1.4401	12708469
DN80 - 3"	EN (DIN)/ASME	PN40	PN10/16/25/40 and Class 150/300	71	Streamline disc	110.9	Stainless steel	1.4408	1.4401	12708471
DN100 - 4"	EN (DIN)/ASME	PN40	PN10/16/25/40 and Class 150/300	80	Streamline disc	164.6	Stainless steel	1.4408	1.4401	12708472

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.