

ASAHI Ball valve Series: 21 Type: 3733 PVC-C Flange PN10




Characteristics

Series: 21
Type: 3733
Construction type: 2-way
Housing construction: 3-part
Housing material: PVC-C
Connection: Flange
Material ball: PVC-C
Seat material: PTFE
Spindle material: PVC-C
Minimum medium temperature (continuous): 0 °C
Maximum medium temperature (continuous): 90 °C

Application

- Recommended in: Chemical

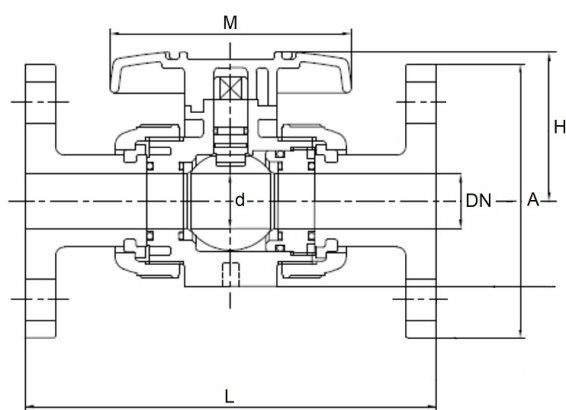

Size table:

DN	d mm	L mm	H mm	M mm	A mm	Weight kg
DN10	13	120	43.5	80	90	0.4
DN15	15	130	51.5	92	95	0.4
DN20	20	150	59.5	100	105	0.7
DN25	25	160	68	110	115	0.9
DN32	32	180	80.5	121	140	1.3
DN40	40	200	89	131	150	1.8
DN50	51	230	102.5	159	165	2.7
DN65	65	290	126	200	185	3.5
DN80	78	310	140	240	200	5.5
DN100	100	350	178	300	220	10.6

Nominal inner diameter	External tube diameter of connection mm	Pressure rating	Face to Face norm	Manual operation	Bore	Primary spindle seal material	Secondary spindle seal material	Body seal	Kv value m³/h	Article
DN10	16	PN10	EN 558, Series 1	Handle	Full bore	EPDM	EPDM	EPDM	6.7	13571645
DN10	16	PN10	EN 558, Series 1	Handle	Full bore	FPM (FKM)	FPM (FKM)	FPM (FKM)	6.7	13571653
DN15	20	PN10	EN 558, Series 1	Handle	Full bore	EPDM	EPDM	EPDM	12	13571646
DN15	20	PN10	EN 558, Series 1	Handle	Full bore	FPM (FKM)	FPM (FKM)	FPM (FKM)	12	13571654
DN20	25	PN10	EN 558, Series 1	Handle	Full bore	EPDM	EPDM	EPDM	24.9	13571647
DN20	25	PN10	EN 558, Series 1	Handle	Full bore	FPM (FKM)	FPM (FKM)	FPM (FKM)	24.9	13571655
DN25	32	PN10	EN 558, Series 1	Handle	Full bore	FPM (FKM)	FPM (FKM)	FPM (FKM)	40.3	13571656

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Nominal inner diameter	External tube diameter of connection mm	Pressure rating	Face to Face norm	Manual operation	Bore	Primary spindle seal material	Secondary spindle seal material	Body seal	Kv value m³/h	Article
DN32	40	PN10	EN 558, Series 1	Handle	Full bore	EPDM	EPDM	EPDM	62.4	13571648
DN32	40	PN10	EN 558, Series 1	Handle	Full bore	FPM (FKM)	FPM (FKM)	FPM (FKM)	62.4	13571657
DN40	50	PN10	EN 558, Series 1	Handle	Full bore	EPDM	EPDM	EPDM	125.7	13571649
DN40	50	PN10	EN 558, Series 1	Handle	Full bore	FPM (FKM)	FPM (FKM)	FPM (FKM)	125.7	13571658
DN50	63	PN10	EN 558, Series 1	Handle	Full bore	EPDM	EPDM	EPDM	156.9	13571650
DN50	63	PN10	EN 558, Series 1	Handle	Full bore	FPM (FKM)	FPM (FKM)	FPM (FKM)	156.9	13571659
DN65	75	PN10	EN 558, Series 1	Handle	Full bore	EPDM	EPDM	EPDM	320	13571651
DN65	75	PN10	EN 558, Series 1	Handle	Full bore	FPM (FKM)	FPM (FKM)	FPM (FKM)	320	13571660
DN80	90	PN10	EN 558, Series 1	Handle	Full bore	EPDM	EPDM	EPDM	430	13571652
DN80	90	PN10	EN 558, Series 1	Handle	Full bore	FPM (FKM)	FPM (FKM)	FPM (FKM)	430	13571661
DN100	110	PN10	EN 558, Series 1	Handle	Full bore	FPM (FKM)	FPM (FKM)	FPM (FKM)	720	13571662

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.