



HAVIT SAE 90° BSPP threaded flange AFS

Supplied without bolt set and O-ring.

Characteristics

Series: AFS


Flange type: SAE 90° flange

Material: Steel

Thread form: BSP

Size table:

Pressure class	SAE flange size	A	B	C	D	E	F1	F2	H
psi	in		mm	mm	mm	mm	mm	mm	mm
3000	1/2	G 1/2"	13	38.1	54	17.5	60	48	16
3000	1/2	G 3/8"	13	38.1	54	17.5	60	48	16
3000	3/4	G 3/4"	19	47.6	65	22.3	63	52	18
3000	1	G 1"	22	52.4	70	26.2	71	51	19
3000	1.1/4	G 1.1/4"	32	58.7	79	30.2	85	73	21
3000	1.1/2	G 1.1/2"	38	69.9	93	35.7	95	83	25
3000	2	G 2"	51	77.8	110	42.9	110	94	25
3000	2.1/2	G 2.1/2"	60/57	88.9	115	50.8	127	96	25
6000	1/2	G 1/2"	13	40.5	54	18.2	60	46	16
6000	1/2	G 3/8"	13	40.5	54	18.2	60	46	16
6000	3/4	G 3/4"	19	50.8	70	23.8	70	56	19
6000	1	G 1"	25	57.2	79	27.8	85	72	21
6000	1.1/4	G 1.1/4"	32	66.6	93	31.8	95	75	25
6000	1.1/2	G 1.1/2"	38	79.3	110	36.5	110	94	25
6000	2	G 2"	51	96.8	134	44.5	132	107	35

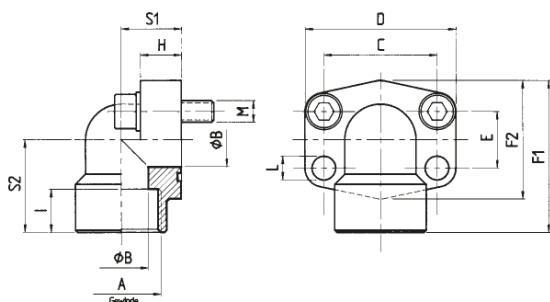

Pressure class	SAE flange size	Surface protection	Thread size	Max. operation pressure	Article
psi	in			bar	
3000	1/2	Zinc-Nickel	G 1/2"	350	14306486
3000	1/2	Zinc-Nickel	G 3/8"	350	14473812
3000	1/2	Untreated	G 1/2"	350	14306477
3000	1/2	Untreated	G 3/8"	350	14306478
3000	3/4	Zinc-Nickel	G 3/4"	350	14306586
3000	3/4	Untreated	G 3/4"	350	14306580
3000	1	Zinc-Nickel	G 1"	320	14306698
3000	1	Untreated	G 1"	320	14306686
3000	1.1/4	Zinc-Nickel	G 1.1/4"	280	14306774
3000	1.1/4	Untreated	G 1.1/4"	280	14306768
3000	1.1/2	Zinc-Nickel	G 1.1/2"	210	14306876
3000	1.1/2	Untreated	G 1.1/2"	210	14306867
3000	2	Zinc-Nickel	G 2"	210	14306998

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Pressure class	SAE flange size	Surface protection	Thread size	Max. operation pressure	Article
psi	in			bar	
3000	2	Untreated	G 2"	210	14306991
3000	2.1/2	Zinc-Nickel	G 2.1/2"	175	14307129
3000	2.1/2	Untreated	G 2.1/2"	175	14307124
6000	1/2	Zinc-Nickel	G 1/2"	420	14307513
6000	1/2	Zinc-Nickel	G 3/8"	420	14473813
6000	1/2	Untreated	G 1/2"	420	14307503
6000	1/2	Untreated	G 3/8"	420	14307505
6000	3/4	Zinc-Nickel	G 3/4"	420	14307621
6000	3/4	Untreated	G 3/4"	420	14307614
6000	1	Zinc-Nickel	G 1"	420	14307722
6000	1	Untreated	G 1"	420	14307710
6000	1.1/4	Zinc-Nickel	G 1.1/4"	420	14307806
6000	1.1/4	Untreated	G 1.1/4"	420	14307794
6000	1.1/2	Zinc-Nickel	G 1.1/2"	420	14307882
6000	1.1/2	Untreated	G 1.1/2"	420	14307876
6000	2	Zinc-Nickel	G 2"	420	14307955
6000	2	Untreated	G 2"	420	14307951

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.