



HAVIT SAE 45° flange adapter JIC 37° WFG


Supplied with two flange halves, screw set and O-ring.

Characteristics

- Series: WFG
- Flange type: SAE 45° flange adapter
- Material: Steel
- Thread form: JIC 37° cone

Size table:

Pressure class	SAE flange size	A	B1	B2	C	D	E	F	L
psi	in		mm	mm	mm	mm	mm	mm	mm
3000	3/4	1.1/16-12 UN	15.5	19	47.6	65	22.2	52	10.5
3000	3/4	7/8-14 UNF	12.3	19	47.6	65	22.2	52	10.5
3000	1	1.1/16-12 UN	15.5	25	52.4	70	26.2	59	10.5
3000	1	1.5/16-12 UN	21.5	25	52.4	70	26.2	59	10.5
3000	1.1/4	1.5/16-12 UN	21.5	27	58.7	79	30.2	73	10.5
3000	1.1/4	1.5/8-12 UN	27.5	27	58.7	79	30.2	73	10.5
3000	1.1/2	1.5/8-12 UN	27.5	36	69.9	94	35.7	83	13.3
3000	1.1/2	1.7/8-12 UN	33	36	69.9	94	35.7	83	13.3
6000	1/2	3/4-16 UNF	11.1	12	40.5	56.4	18.2	47.8	8.5
6000	1/2	7/8-14 UNF	12.3	12	40.5	56.4	18.2	47.8	8.5
6000	3/4	1.1/16-12 UN	15.5	17	50.8	71	23.8	61	10.5
6000	3/4	7/8-14 UNF	12.3	17	50.8	71	23.8	61	10.5
6000	1	1.1/16-12 UN	15.5	24	57.2	81	27.8	70	13.3
6000	1	1.5/16-12 UN	21.5	24	57.2	81	27.8	70	13.3
6000	1.1/4	1.5/16-12 UN	21.5	31	66.7	95	31.8	78	13.3
6000	1.1/4	1.5/8-12 UN	27.5	31	66.7	95	31.8	78	13.3
6000	1.1/2	1.5/8-12 UN	27.5	36	79.4	113	36.5	95	16.8
6000	1.1/2	1.7/8-12 UN	33	36	79.4	113	36.5	95	16.8

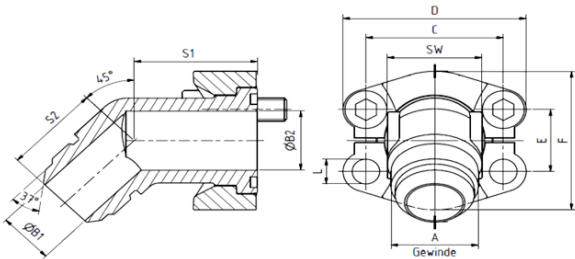

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Pressure class psi	SAE flange size in	Surface protection	Thread size	Max. operation pressure bar	Article
3000	3/4	Untreated	1.1/16-12 UN	350	14312706
3000	3/4	Untreated	7/8-14 UNF	350	14312712
3000	1	Untreated	1.1/16-12 UN	320	14312799
3000	1	Untreated	1.5/16-12 UN	320	14312805
3000	1.1/4	Untreated	1.5/16-12 UN	280	14312938
3000	1.1/4	Untreated	1.5/8-12 UN	280	14312944
3000	1.1/2	Untreated	1.5/8-12 UN	210	14313037
3000	1.1/2	Untreated	1.7/8-12 UN	210	14313043
6000	1/2	Untreated	3/4-16 UNF	420	14313098
6000	1/2	Untreated	7/8-14 UNF	420	14313103
6000	3/4	Untreated	1.1/16-12 UN	400	14313162
6000	3/4	Untreated	7/8-14 UNF	400	14313168
6000	1	Untreated	1.1/16-12 UN	400	14313227
6000	1	Untreated	1.5/16-12 UN	400	14313233
6000	1.1/4	Untreated	1.5/16-12 UN	400	14313303
6000	1.1/4	Untreated	1.5/8-12 UN	400	14313309
6000	1.1/2	Untreated	1.5/8-12 UN	400	14313369
6000	1.1/2	Untreated	1.7/8-12 UN	400	14313375

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.