



HAVIT SAE 90° flange adapter DIN 3901 metric WFG

Supplied with two flange halves, screw set and O-ring.

Characteristics

Series: WFG



Flange type: SAE 90° flange adapter

Material: Steel

Thread form: Metric 24° cone

Size table:


Pressure class	SAE flange size	A	B1	B2	C	D	E	F	I
psi	in		mm	mm	mm	mm	mm	mm	mm
3000	1/2	M 22x1.5	12	11	38.1	54	17.5	46	7
3000	1/2	M 24x1.5	12	12	38.1	54	17.5	46	8.5
3000	3/4	M 26x1.5	15	19	47.6	65	22.3	52	7.5
3000	3/4	M 30x2	16	19	47.6	65	22.3	52	10.5
3000	3/4	M 30x2	19	19	47.6	65	22.3	52	7.5
3000	3/4	M 36x2	17	19	47.6	65	22.3	52	12
3000	1	M 36x2	20	25	52.4	70	26.2	59	12
3000	1	M 36x2	24	25	52.4	70	26.2	59	7.5
3000	1	M 42x2	24	25	52.4	70	26.2	59	13.5
3000	1.1/4	M 36x2	20	27	58.7	79	30.2	73	12
3000	1.1/4	M 42x2	25	27	58.7	79	30.2	73	13.5
3000	1.1/4	M 45x2	30	27	58.7	79	30.2	73	10.5
3000	1.1/4	M 52x2	28	27	58.7	79	30.2	73	16
3000	1.1/2	M 52x2	32	32	69.9	94	35.7	83	16
3000	1.1/2	M 52x2	36	36	69.9	94	35.7	83	11
3000	2	M 52x2	32	45	77.8	102	42.9	97	16
3000	2	M 52x2	36	45	77.8	102	42.9	97	11
6000	1/2	M 24x1.5	12	12	40.5	56	18.2	48	8.5



Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Size table:

Pressure class	SAE flange size	A	B1	B2	C	D	E	F	I
6000	3/4	M 24x1.5	12	17	50.8	71	23.8	60	8.5
6000	3/4	M 30x2	16	17	50.8	71	23.8	60	10.5
6000	3/4	M 36x2	17	17	50.8	71	23.8	60	12
6000	1	M 30x2	16	24	57.2	81	27.8	70	10.5
6000	1	M 36x2	20	24	57.2	81	27.8	70	12
6000	1	M 42x2	24	24	57.2	81	27.8	70	13.5
6000	1.1/4	M 36x2	20	31	66.7	95	31.8	78	12
6000	1.1/4	M 42x2	25	31	66.6	95	31.8	78	13.5
6000	1.1/4	M 52x2	28	31	66.6	95	31.8	78	16
6000	1.1/2	M 42x2	25	36	79.3	113	36.5	95	13.5
6000	1.1/2	M 52x2	30	36	79.3	113	36.5	95	16
6000	2	M 52x2	32	45	96.8	133	44.5	114	13.5

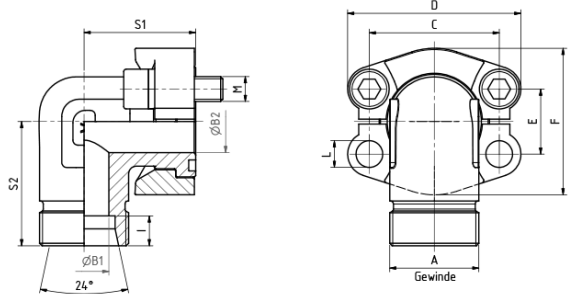

Pressure class psi	SAE flange size in	Surface protection	Thread size	Max. operation pressure bar	Article
3000	1/2	Untreated	15L - M22x1.5	315	14312618
3000	1/2	Untreated	16S - M24x1.5	350	14312628
3000	3/4	Untreated	18L - M26x1.5	315	14312665
3000	3/4	Untreated	20S - M30x2.0	350	14312684
3000	3/4	Untreated	22L - M30x2.0	160	14312675
3000	3/4	Untreated	25S - M36x2.0	350	14312693
3000	1	Untreated	25S - M36x2.0	320	14312769
3000	1	Untreated	28L - M36x2.0	160	14312758
3000	1	Untreated	30S - M42x2.0	320	14312783
3000	1.1/4	Zinc Plated	25S - M36x2.0	280	14312879
3000	1.1/4	Zinc Plated	25S - M36x2.0	280	14312881
3000	1.1/4	Zinc Plated	30S - M42x2.0	280	14312899
3000	1.1/4	Zinc Plated	30S - M42x2.0	280	14312897
3000	1.1/4	Zinc Plated	30S - M42x2.0	280	14312895
3000	1.1/4	Zinc Plated	35L - M45x2.0	160	14312860
3000	1.1/4	Zinc Plated	38S - M52x2.0	280	14312916
3000	1.1/4	Zinc Plated	38S - M52x2.0	280	14312915
3000	1.1/4	Zinc Plated	38S - M52x2.0	280	14312912
3000	1.1/4	Zinc-Nickel	25S - M36x2.0	280	14312877
3000	1.1/4	Untreated	25S - M36x2.0	280	14312875
3000	1.1/4	Untreated	30S - M42x2.0	280	14312893
3000	1.1/4	Untreated	35L - M45x2.0	160	14312856
3000	1.1/4	Untreated	38S - M52x2.0	280	14312911
3000	1.1/2	Untreated	38S - M52x2.0	210	14313013

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Pressure class psi	SAE flange size in	Surface protection	Thread size	Max. operation pressure bar	Article
3000	1.1/2	Untreated	42L - M52x2.0	160	14312993
3000	2	Untreated	38S - M52x2.0	200	14313076
3000	2	Untreated	42L - M52x2.0	160	14313070
6000	1/2	Untreated	16S - M24x1.5	420	14317680
6000	3/4	Untreated	16S - M24x1.5	420	14313130
6000	3/4	Untreated	20S - M30x2.0	420	14313138
6000	3/4	Untreated	25S - M36x2.0	420	14313146
6000	1	Zinc Plated	20S - M30x2.0	420	14313202
6000	1	Untreated	25S - M36x2.0	420	14313206
6000	1	Untreated	30S - M42x2.0	420	14313214
6000	1.1/4	Zinc Plated	25S - M36x2.0	420	14313270
6000	1.1/4	Zinc Plated	30S - M42x2.0	420	14313277
6000	1.1/4	Zinc Plated	38S - M52x2.0	350	14313287
6000	1.1/4	Untreated	25S - M36x2.0	420	14317683
6000	1.1/4	Untreated	30S - M42x2.0	420	14313276
6000	1.1/4	Untreated	38S - M52x2.0	350	14313286
6000	1.1/2	Untreated	30S - M42x2.0	350	14313348
6000	1.1/2	Untreated	38S - M52x2.0	350	14313353
6000	2	Untreated	38S - M52x2.0	315	14313397

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.