

ECON® Glass tube thermometer fig. 1654 plastic small size model

Characteristics

Type: 1654


Model: Small (110 mm) Construction type: Straight **Connection location: Below**

Process connection: External thread

Housing material: Plastic Max. operating pressure: 16 bar

Application

• Recommended in: Machine Construction, Utilities

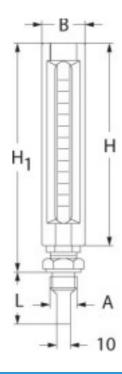

Size table:

L L	G	В	ØD	н	HI
mm		mm	mm	mm	mm
40 - 50 - 63	1/2"	36	10	110	130

Measuring range	Size process connection	Insert length	Process connection material	TMA - maximum allowable temperature	Article
°C		mm		°C	
0 / 120	1/2" BSPP(G)	40	Brass	120	12725760
0 / 120	1/2" BSPP(G)	50	Brass	120	12725761
0 / 120	1/2" BSPP(G)	63	Brass	120	12725762

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

E-mail: valves@eriks.be

Page 1/1

PR1688736697600233_EN_10.05.2024