


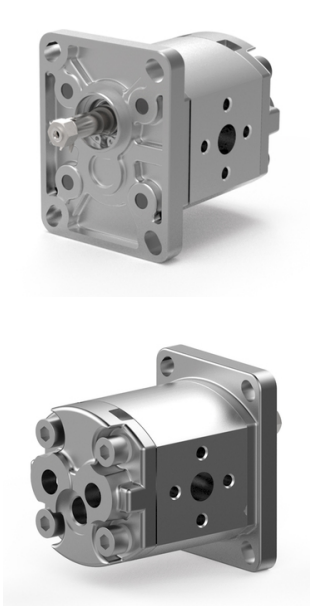

WALVOIL 1SM-A group 1, flange: EUR (72x52 mm), tapered shaft 10: 1:8 M6, N connections: flange

Characteristics

Direction of rotation: Clockwise

Mounting flange	Drive shaft	Displacement cm³/r	Max. operating pressure bar	Inlet port	Outlet port	Position oil ports	Code	Article
European GR.1 (72x52 mm) ø 25,4 mm	European tapered 1:8 (M6)	3,7	250	European flanged ports 30/12/M6	European flanged ports 30/12/M6	Side	ISM-A-037-D-EUR-H-N-10-0-N	13307367
European GR.1 (72x52 mm) ø 25,4 mm	European tapered 1:8 (M6)	4,2	250	European flanged ports 30/12/M6	European flanged ports 30/12/M6	Side	ISM-A-042-D-EUR-H-N-10-0-N	13307368
European GR.1 (72x52 mm) ø 25,4 mm	European tapered 1:8 (M6)	5,0	250	European flanged ports 30/12/M6	European flanged ports 30/12/M6	Side	ISM-A-050-D-EUR-H-N-10-0-N	13307369
European GR.1 (72x52 mm) ø 25,4 mm	European tapered 1:8 (M6)	6,3	170	European flanged ports 30/12/M6	European flanged ports 30/12/M6	Side	ISM-A-063-D-EUR-H-N-10-0-N	13307370
European GR.1 (72x52 mm) ø 25,4 mm	European tapered 1:8 (M6)	7,76	170	European flanged ports 30/12/M6	European flanged ports 30/12/M6	Side	ISM-A-078-D-EUR-H-N-10-0-N	13307371
European GR.1 (72x52 mm) ø 25,4 mm	European tapered 1:8 (M6)	9,78	150	European flanged ports 30/12/M6	European flanged ports 30/12/M6	Side	ISM-A-098-D-EUR-H-N-10-0-N	13307372

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.