




ASAHI Butterfly valve Series: 57 Type: 3743 PP/PP Handle Wafer type

Characteristics

Series: 57
Type: 3743
Norm: EN (DIN)
Valve design: Centric
Housing material: PP
Connection: Wafer type
Face to Face norm: Manufacturer standard
Operation: Handle
Housing lining: Not replaceable
Disk material: PP
Primary spindle seal material: FPM (FKM)
Actuator material: Plastic

Application

- Recommended in: Chemical

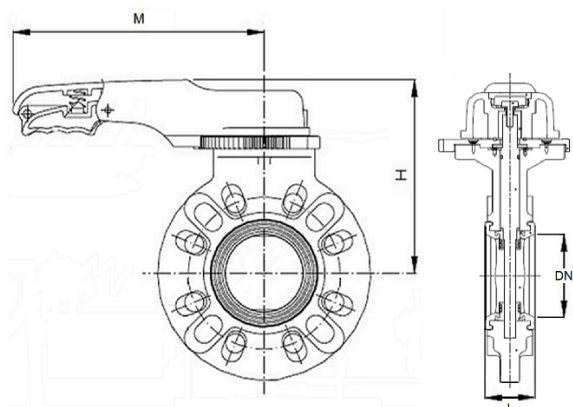

Size table:

DN	H mm	L mm	M mm	Weight kg
DN40	156	39	220	1.1
DN50	166	42	220	1.2
DN65	176	46	220	1.4
DN80	191	46	250	1.6
DN100	206	56	250	2
DN125	237	66	320	4
DN150	252	71	320	4.6
DN200	283	87	400	7.4

Nominal inner diameter	Pressure rating	Pressure rating flange	Face to Face length mm	Material liner	Spindle material	Quality class spindle	Minimum medium temperature (continuous) °C	Maximum medium temperature (continuous) °C	Article
DN40	PN10	PN10	39	EPDM	Stainless steel	1.4401	-20	80	12478862
DN50	PN10	PN10	42	EPDM	Stainless steel	1.4401	-20	80	11455723
DN50	PN10	PN10	42	FPM (FKM)	Stainless steel	1.4401	-20	80	12150794
DN65	PN10	PN10	46	EPDM	Stainless steel	1.4401	-20	80	12079117
DN65	PN10	PN10	46	FPM (FKM)	Stainless steel	1.4401	-20	80	13248788
DN80	PN10	PN10	46	EPDM	Stainless steel	1.4401	-20	80	11455727
DN80	PN10	PN10	46	FPM (FKM)	Stainless steel	1.4401	-20	80	13248789
DN100	PN10	PN10	56	EPDM	Stainless steel	1.4401	-20	80	11155646
DN100	PN10	PN10	56	FPM (FKM)	Stainless steel	1.4401	-20	80	13248790
DN125	PN10	PN10	66	EPDM	Stainless steel	1.4401	-20	80	12478863
DN125	PN10	PN10	66	FPM (FKM)	Stainless steel	1.4401	-20	80	13248791

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Nominal inner diameter	Pressure rating	Pressure rating flange	Face to Face length	Material liner	Spindle material	Quality class spindle	Minimum medium temperature (continuous)	Maximum medium temperature (continuous)	Article
			mm				°C	°C	
DN150	PN10	PN10	71	EPDM	Stainless steel	1.4401	-20	80	11158178
DN200	PN10	PN10	87	EPDM	Stainless steel	1.4401	-20	80	12478865
DN200	PN10	PN10	87	FPM (FKM)	Stainless steel	1.4401	-20	80	12661853

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.