



ASAHI Diaphragm valve Series: 14 Type: 3769 PVDF-EL Flange PN10

This is a dual-use or controlled item. When exporting this item outside the EU an export license is required from the regulatory authorities.

Characteristics

Series: 14

Type: 3769

Housing construction: A (Weir type)

Housing material: PVDF-EL

Connection: Flange

Face to Face norm: EN 558, Series 1


Manual operation: Hand wheel

Application

- Recommended in: Chemical

Size table:

DN	A	L	H	M	Weight
	mm	mm	mm	mm	kg
DN15	95	130	104	100	0.8
DN20	105	150	88	100	0.9
DN25	115	160	111	100	1.2
DN32	135	180	116	100	1.5
DN40	150	200	177	156	2.9
DN50	158	230	191	156	3.9
DN65	185	290	266	220	6
DN80	200	310	280	220	7.4
DN100	220	350	329	257	12.5

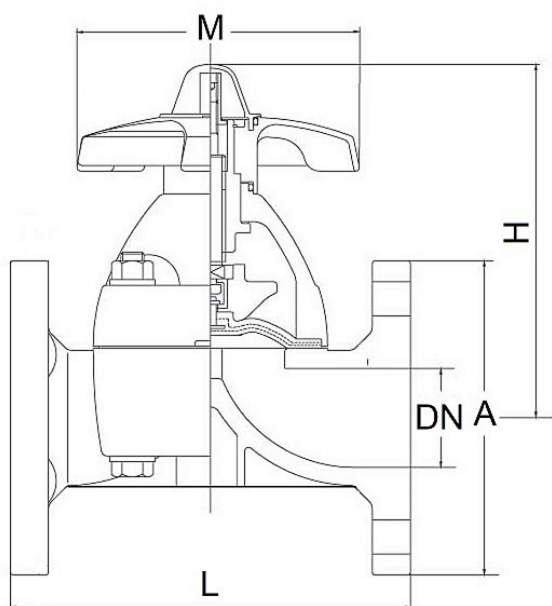

Membrane material	External tube diameter of connection	Nominal inner diameter	Pressure rating	Face to Face length	Material bonnet	Actuator material	Minimum medium temperature (continuous)	Maximum medium temperature (continuous)	Kv value	Article
	mm			mm			°C	°C	m³/h	
PTFE-EL	20	DN15	PN10	130	PPG	PP	-40	120	4.1	13248741
PTFE-EL	25	DN20	PN10	150	PPG	PP	-40	120	4.6	13248742
PTFE-EL	32	DN25	PN10	160	PPG	PP	-40	120	7.3	13248743
PTFE-EL	40	DN32	PN10	180	PPG	PP	-40	120	9.5	13248744
PTFE-EL	50	DN40	PN10	200	PPG	PP	-40	120	22.5	13248745

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Diaphragm Valves | Diaphragm Valves with Flange Connection

Membrane material	External tube diameter of connection	Nominal inner diameter	Pressure rating	Face to Face length	Material bonnet	Actuator material	Minimum medium temperature (continuous)	Maximum medium temperature (continuous)	Kv value	Article
	mm			mm			°C	°C	m³/h	
PTFE-EL	63	DN50	PN10	230	PPG	PP	-40	120	37.2	13248746
PTFE-EL	75	DN65	PN10	290	PPG	PP	-40	120	73.4	13248747
PTFE-EL	90	DN80	PN10	310	PPG	PP	-40	120	99.4	13248748
PTFE-EL	110	DN100	PN10	350	PPG	PP	-40	120	159.8	13248749

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.