



ASAHI Diaphragm valve Series: 14 Type: 3766 PP Pneumatic operated Single acting, spring closing Plastic welded sleeve PN10

Characteristics

Series: 14

Type: 3766

Housing construction: A [Weir type]

Housing material: PP

Connection: Plastic welded sleeve


Face to Face norm: Manufacturer standard

Actuator: Pneumatic operated

Operating principle: Single acting, spring closing

Application

- Recommended in: Chemical

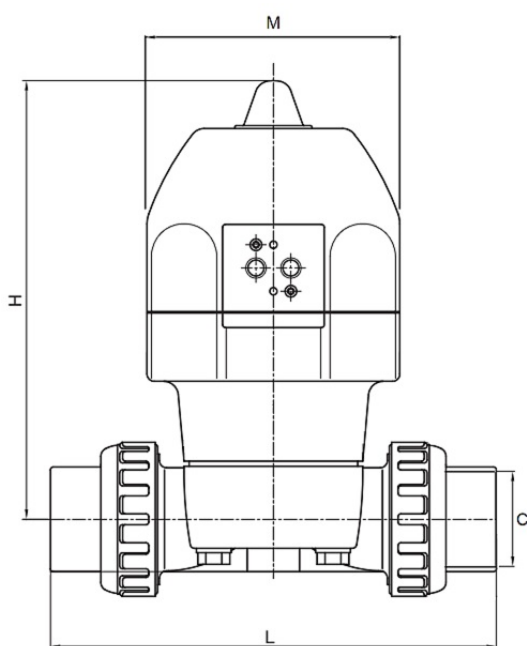

Size table:

C	L	H	M	Weight
mm	mm	mm	mm	kg
20	125	104	130	2.5
25	141	111	130	2.5
32	164	111	130	3
40	177	116	130	3
50	231	177	174	6.5
63	274	191	174	7

Membrane material	External tube diameter of connection	Pressure rating	Face to Face length	Material bonnet	Actuator material	Minimum medium temperature [continuous]	Maximum medium temperature [continuous]	Kv value	Article
	mm		mm			°C	°C	m³/h	
EPDM	20	PN10	125	PPG	PPG	-20	90	4.1	13248708
EPDM	25	PN10	141	PPG	PPG	-20	90	4.6	13248709
EPDM	32	PN10	164	PPG	PPG	-20	90	7.3	13248710
EPDM	40	PN10	177	PPG	PPG	-20	90	9.5	13248711
EPDM	50	PN10	231	PPG	PPG	-20	90	22.5	13248712
EPDM	63	PN10	274	PPG	PPG	-20	90	37.2	13248713

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.