




ASAHI Diaphragm valve Series: 14 Type: 3763 PVC-C Pneumatic operated Single acting, spring closing Glued sleeve PN10

Characteristics

Series: 14
Type: 3763
Housing construction: A [Weir type]
Housing material: PVC-C
Connection: Glued sleeve
Face to Face norm: Manufacturer standard
Actuator: Pneumatic operated
Operating principle: Single acting, spring closing

Application

- Recommended in: Chemical

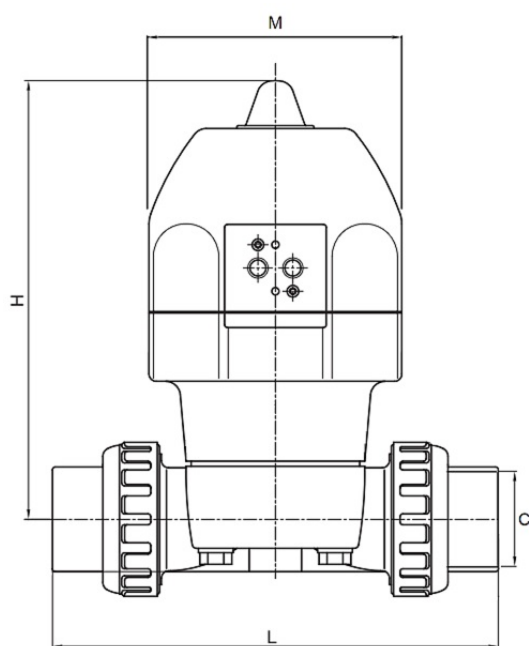

Size table:

C	L	H	M	Weight
mm	mm	mm	mm	kg
20	128	104	130	3
25	147	111	130	3
32	172	111	130	3
40	188	116	130	3.5
50	246	177	174	7
63	294	191	174	8

Membrane material	External tube diameter of connection	Pressure rating	Face to Face length	Material bonnet	Actuator material	Minimum medium temperature [continuous]	Maximum medium temperature [continuous]	Kv value	Article
	mm		mm			°C	°C	m³/h	
EPDM	20	PN10	128	PPG	PPG	0	90	4.1	13248776
EPDM	25	PN10	147	PPG	PPG	0	90	4.6	13248777
EPDM	32	PN10	172	PPG	PPG	0	90	7.3	13248778
EPDM	40	PN10	188	PPG	PPG	0	90	9.5	13248779
EPDM	50	PN10	246	PPG	PPG	0	90	22.5	13248780
EPDM	63	PN10	294	PPG	PPG	0	90	37.2	13248781

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.