




ECON® Glass tube thermometer fig. 1650 aluminum insertion angle 90° large size model

Characteristics

Type: 1650
Model: Large (200 mm)
Construction type: Angle pattern
Angle: 90°
Connection location: Back
Process connection: External thread
Housing material: Aluminium
Max. operating pressure: 16 bar
Surface protection: Anodized

Application

- Recommended in: Machine Construction, Utilities

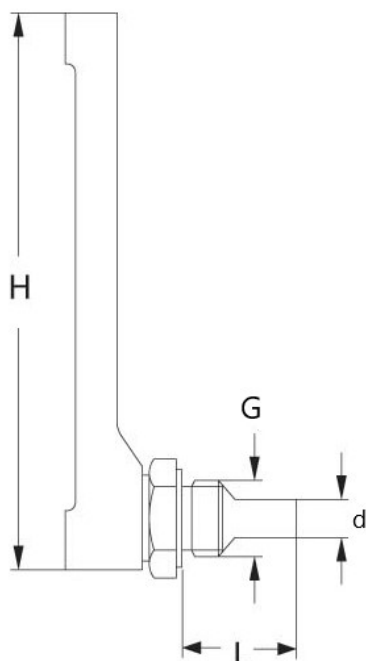

Size table:

L	G	ØD	H
mm		mm	mm
63 - 100 - 160	1/2"	10	200

Measuring range	Size process connection	Insert length	Process connection material	TMA - maximum allowable temperature	Article
°C		mm		°C	
-30 / 50	1/2" BSPP(G)	63	Brass	50	11812550
-30 / 50	1/2" BSPP(G)	100	Brass	50	14496416
-30 / 50	1/2" BSPP(G)	160	Brass	50	13502815
0 / 100	1/2" BSPP(G)	100	Brass	100	12954823
0 / 120	1/2" BSPP(G)	63	Brass	120	11812547
0 / 120	1/2" BSPP(G)	100	Brass	120	11812549
0 / 120	1/2" BSPP(G)	160	Brass	120	12765142
0 / 160	1/2" BSPP(G)	160	Brass	160	13501978

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.