



ECON® Glass tube thermometer fig. 1647 aluminum large size model

Characteristics

Type: 1647

Model: Large (200 mm)

Construction type: Straight

Connection location: Below

Process connection: External thread


Housing material: Aluminium

Max. operating pressure: 16 bar

Surface protection: Anodized

Application

- Recommended in: Machine Construction, Utilities

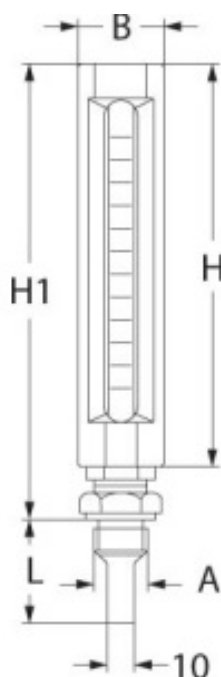

Size table:

L	G	B	ØD	H	H1
mm		mm	mm	mm	mm
63-100-160	1/2"	36	10	200	220

Measuring range °C	Size process connection	Insert length mm	Process connection material	TMA - maximum allowable temperature °C	Article
-30 / 50	1/2" BSPP(G)	63	Brass	50	11812521
0 / 100	1/2" BSPP(G)	63	Brass	100	11812522
0 / 100	1/2" BSPP(G)	100	Brass	100	12954814
0 / 120	1/2" BSPP(G)	63	Brass	120	11812523
0 / 120	1/2" BSPP(G)	100	Brass	120	13384369
0 / 120	1/2" BSPP(G)	160	Brass	120	13263231
0 / 200	1/2" BSPP(G)	160	Brass	200	13384425

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.