

Fill and drain valve Type: 450 Bronze External thread (BSPP)/Hose tail

Characteristics

Type: 450

Norm: EN (DIN)

Execution: Fill/drain cock

Construction type: Straight

Housing material: Bronze

Connection: External thread (BSPP)

Connection 2: Hose tail

Self-locking: No

Type of disc: Plug type

Maximum medium temperature (continuous): 150 °C


Maximum pressure at 20 °C: 16 bar

With operating key: No

With sealing cap: Yes

Application

- Recommended in: Utilities

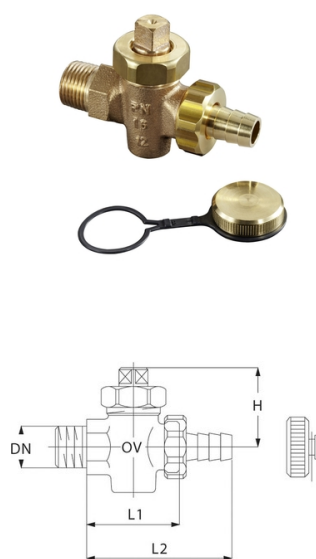

DN ["]	L1 [mm]	L2 [mm]	H [mm]
3/8	40,5	80	56
1/2	47,5	87,5	63
3/4	53,5	102	68
1	62,5	129	90

Min./Max.	Press./Temp.
Max.oper.press	16bar
Max. temperature	150°C

Nominal inner diameter	Diameter, hose connector mm	Pressure rating	Face to Face length mm	Operation	Material disc	Article
3/8" [10]	10	PN16	80	Ridge	Bronze	11811288
1/2" [15]	15	PN16	87.5	Ridge	Brass	13368712
3/4" [20]	20	PN16	101.5	Ridge	Bronze	11811287
1" [25]	25	PN16	128.5	Ridge	Bronze	11811285

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.