



ECON® Pneumatic actuator Type: 79015 Stainless steel Single acting, spring closing

Characteristics

Type: 79015

Transmission: Quarter turn

Operating principle: Single acting, spring closing

Top flange standard: ISO 5211

Spring set at 6 bar signal pressure: S12

Material housing: Stainless steel

Material quality: 1.4401

Material cover: 1.4401

Spindle material: 1.4401

Material bolts: 1.4401

Top flange connection: NAMUR [VDI/VDE 3845]

With mechanical setting indicator: Yes

Puck: Yes


Puck for sensor: No

Connection standard air supply: NAMUR [VDI/VDE 3845]

Air supply connection: 1/4" [8] internal thread [BSPP]

Application

- Recommended in: Food & Beverages

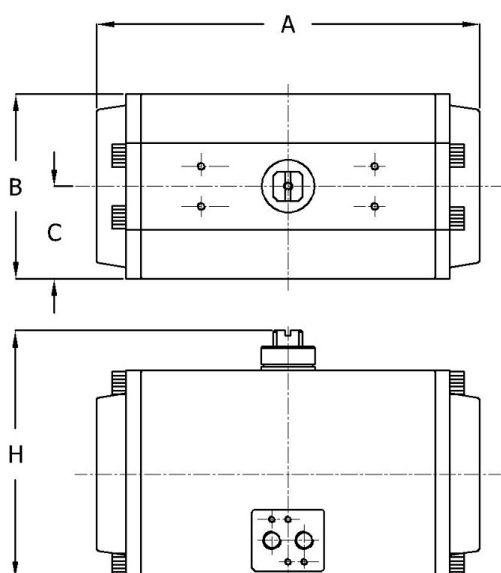

Size table:

Model	A	B	C	H	Weight
	mm	mm	mm	mm	kg
45SR	148	70	41	85	3
60SR	167	79	44	121	4
85SR	197	102	54	128	7
105SR	250	122	63	153	13
125SR	284	140	72	185	20
140SR	360	154	78	202	28
160SR	420	173	86	227	38
210SR	530	226	113	285	100

Model	Mounting flange	Mounting flange 2	Stem shape	Square dimensions	Torque single acting start air 6 bar	Torque single acting end air 6 bar	Distance of mounting holes	Shaft height	Weight	Article
				mm	Nm	Nm		mm	kg	
45SR	F03	F05	Double square	11	10	7	80x30	20	3	12697389
60SR	F05		Double square	14	25	16	80x30	20	4	12950336
85SR	F05	F07	Double square	17	52	38	80x30	20	7	12654186
105SR	F07		Double square	22	117	75	80x30	20	13	13000662
125SR	F07	F10	Double square	22	175	125	130x30	30	20	12697390
140SR	F10	F12	Double square	27	309	205	130x30	30	28	12697391
160SR	F10	F12		27	449	335	130x30	30	38	12697392
210SR	F14			36	884	625	130x30	30	100	12697413

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.