


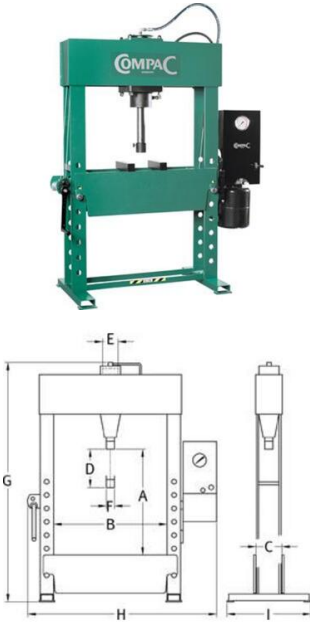

COMPAC Workshop press with electrohydraulic system

Workshop press with electrical-hydraulics

- Double-wound cylinder, pressure and supply air [Model EP40D, EP60D, EP100D]
 - Large, robust piston to 100 mm diameter (measurement F)
 - Extra long lift 320 mm (measurement D)
 - Pressure up to 100 t
 - Laterally movable press cylinder (except model EP 100)
 - 2-level electro-hydraulic pump at model EP100, otherwise 1-level.
 - Fast and safe pressing, table height adjustment via an individually stopped gripping mechanism
- [Model EP 100 with chains]
- Up to 90° movable pump unit [Model EP40, EP40D–EP60, EP60D]
 - Multi-adjustable pressure valve with easy to read pressure indicator incl. t/kN-scale
 - 2 V-blocks and one easy to read pressure display standard

Lifting capacity kg	Maximum lifting height mm	Weight kg	Article
40000	840	345	12328273
60000	300	717	12965235
60000	850	670	12328274
100000	900	910	12328272

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.