

ECON® Bimetal thermometer fig. 11000 steel/brass insert



Characteristics

Type: 11000
Accuracy class: Class 2 EN 13190
Connection location: Back
Process connection: External thread
With pocket tube: Yes
Cabinet material: Steel, galvanized
Window material: Glass
Material dial: Aluminium
Maximum operating pressure [Bar]: 25 bar
Level of protection [IP value]: IP43


Application

- General industry.
- Climate industry.
- Warming industry (up to 120 °C).

Technical Information

- Removable brass pocket tube by means of locking screw.
- Zero point adjustment at backside insert.

Size table:

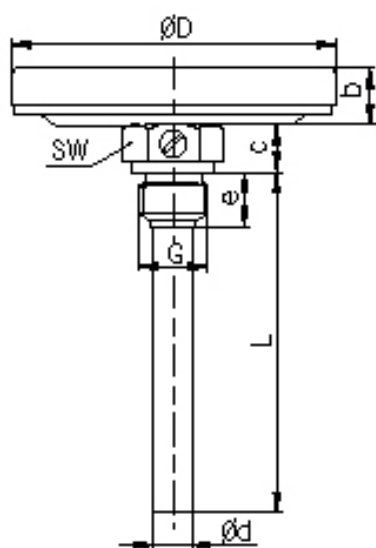

Cabinet diameter	Insert	ØD	b	c	d	e	SW	G
	mm	mm	mm	mm	mm	mm	mm	in
R63	45,63,100	63	13	11	12	12	21	1/2"
R80	45,63,80,100	80	13	11	12	12	21	1/2"
R100	28,45,63,100	100	15	11	12	12	21	1/2"

Measuring range	Cabinet diameter	Size process connection	Insert length	Sensor diameter	Diameter pocket tube	Ring material	Process connection material	Sensor material	Pocket tube material	Article
°C	mm		mm	mm	mm					
-30 / 50	63	1/2" BSPP[G]	45	9	12	Steel, nickel plated	Brass	Brass	Brass	11556297
0 / 120	63	1/2" BSPP[G]	63	9	12	Steel, nickel plated	Brass	Brass	Brass	10060345
0 / 120	63	1/2" BSPP[G]	100	9	12	Steel, nickel plated	Brass	Brass	Brass	10060346
0 / 120	80	1/2" BSPP[G]	45	9	12	Steel, nickel plated	Brass	Brass	Brass	10060347
0 / 120	80	1/2" BSPP[G]	63	9	12	Steel, nickel plated	Brass	Brass	Brass	10060348
0 / 120	80	1/2" BSPP[G]	100	9	12	Steel, nickel plated	Brass	Brass	Brass	10060349
0 / 120	100	1/2" BSPP[G]	45	9	12	Steel, nickel plated	Brass	Brass	Brass	10060350
0 / 120	100	1/2" BSPP[G]	63	9	12	Steel, nickel plated	Brass	Brass	Brass	10060351

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Measuring range	Cabinet diameter	Size process connection	Insert length	Sensor diameter	Diameter pocket tube	Ring material	Process connection material	Sensor material	Pocket tube material	Article
°C	mm		mm	mm	mm					
0 / 120	100	1/2" BSPP[G]	100	9	12	Steel, nickel plated	Brass	Brass	Brass	10060352

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.