



Bimetal thermometer fig. 678 stainless steel/stainless steel back connection spring

Characteristics

Type: 678

Accuracy class: Class 2 EN 13190

Connection location: Back

Connection: Spring

With pocket tube: No

Cabinet material: Stainless steel 304


Window material: Glass

Material dial: Aluminium

Level of protection (IP value): IP43

Size table:

Cabinet diameter	ØD	b2	Weight
	mm	mm	kg
R63	65	13	0.5

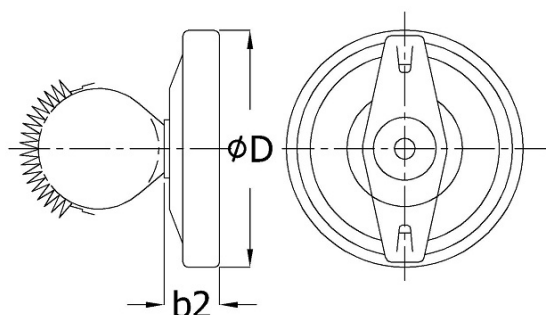

Measuring range	Cabinet diameter	Ring material	Process connection material	Weight	Article
°C	mm			kg	
0 / 120	63	Stainless steel 304	Stainless steel 304	0.5	11811578
0 / 160	63	Stainless steel 304	Stainless steel 304	0.5	11811577
-30 / 60	63	Stainless steel 304	Stainless steel 304	0.5	11811576

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.