

MOBREY Float switch fig. 8413 castiron vertical flange

Characteristics

Series: A13

Type: 8413

Process connection: Flange

Contact version: Silver

Switching power: 440V / 5A / 2000VA AC - 250V / 0,5A / 100W DC inductive - 250V / 5A / 100W DC resistive

Switching differential: 25 mm

Switching range: 62 mm

Housing material: Cast iron

Characteristics [2]

Material wet portion housing: Cast iron


Float material: Monel

Material cover: Steel

Material of connection: Cast iron

Level of protection (IP value): IP65

Medium temperature: 0 / 195 °C

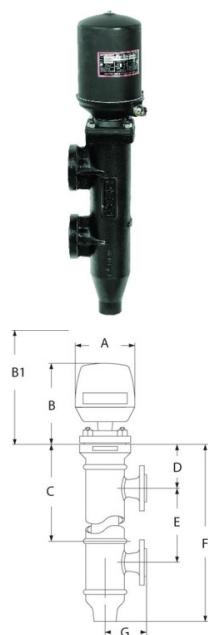

Model	Mounting	Size process connection	Standard connection	Pressure rating flange	Max. operating pressure bar	Min. specific density of liquid kg/m ³	Float diameter mm	Contact type	Adjustable differential gap	Article
Vertical float switch	Vertical	DN25	(EN) DIN	PN16	13	869	67	1 x NO en 1 x NC	Yes	12160767
Vertical float switch	Vertical	DN25	(EN) DIN	PN16	13	869	67	1 x NO en 1 x NC	Yes	12160769
Vertical float switch	Vertical	DN25	(EN) DIN	PN16	13	869	67	1 x NO en 1 x NC	Yes	12160770
Vertical float switch	Vertical	DN25	(EN) DIN	PN16	13	869	67	1 x NO en 1 x NC	Yes	12160771
Vertical float switch	Vertical	DN25	(EN) DIN	PN16	13	869	67	1 x NO en 1 x NC	Yes	12160768

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.