



ECON® Ball valve Type: 1607NPT Brass Internal thread (NPT) PN30/40/64

Characteristics

Type: 1607NPT
Norm: ASME
Construction type: 2-way
Housing construction: 2-part
Housing material: Brass
Material quality: CW617N
Surface protection: Nickel-plated
Connection: Internal thread (NPT)
Secondary spindle seal material: FPM (FKM)
Body seal: PTFE
Actuator material: Steel, galvanized

Application

- HVAC, water and compressed air systems.

Technical Information

- Connections with female threads in accordance with ASME B1.20.1.
- Ball valve with floating ball.
- Version with lever.
- Available in sizes ranging from 1/4" to 4".
- Pressure class PN64 for the 1/4" to 3/8" versions, PN40 for the 1/2" to 2" versions and PN30 for the 2 1/2" to 4" versions.


Construction

- Two-piece housing construction.
- Full bore.
- Face-to-face dimension according to manufacturer's standard.

Options

- Connections with BSP threads in accordance with NEN-EN 10226-1 (ISO 7/1), figure 1607.
- Available with extended spindle for insulation.

Size table:

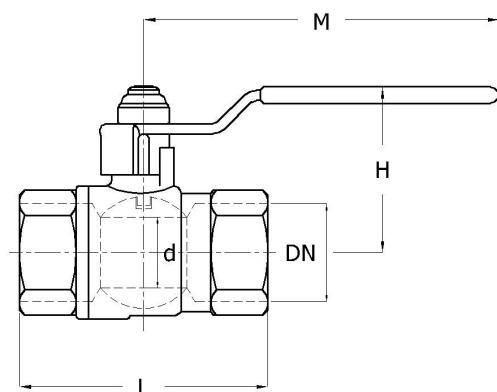

DN	d	L	H	M	Weight
	mm	mm	mm	mm	kg
1/4" [8]	10	43.5	38	90	0.14
3/8" [10]	10	45	38	90	0.14
1/2" [15]	12.5	58.5	39.5	90	0.18
3/4" [20]	20	64.5	49.5	105	0.31
1" [25]	25	77.5	51.5	105	0.49
1.1/4" [32]	32	89.5	62	120	0.89
1.1/2" [40]	40	97	71	140	1.27
2" [50]	50	111.5	85.5	170	2.14
2.1/2" [65]	65	141	99.5	170	3.53
3" [80]	80	162.5	113.2	250	5.66

Nominal inner diameter	Standard thread connection	Pressure rating	Face to Face norm	Manual operation	Bore	Material ball	Seat material	Spindle material	Primary spindle seal material	Article
1/4" [8]	ASME B1.20.1	PN64	Manufacturer standard	Handle	Full bore	CW614N chromed	PTFE	Brass	PTFE	12439163
3/8" [10]	ASME B1.20.1	PN64	Manufacturer standard	Handle	Full bore	CW614N chromed	PTFE	Brass	PTFE	12439164

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Nominal inner diameter	Standard thread connection	Pressure rating	Face to Face norm	Manual operation	Bore	Material ball	Seat material	Spindle material	Primary spindle seal material	Article
1/2" [15]	ASME B1.20.1	PN40	Manufacturer standard	Handle	Full bore	CW614N chromed	PTFE	Brass	PTFE	12439165
3/4" [20]	ASME B1.20.1	PN40	Manufacturer standard	Handle	Full bore	CW614N chromed	PTFE	Brass	PTFE	12439166
1" [25]	ASME B1.20.1	PN40	Manufacturer standard	Handle	Full bore	CW614N chromed	PTFE	Brass	PTFE	12439167
1.1/4" [32]	ASME B1.20.1	PN40	Manufacturer standard	Handle	Full bore	CW614N chromed	PTFE	Brass	PTFE	12439168
1.1/2" [40]	ASME B1.20.1	PN40	Manufacturer standard	Handle	Full bore	CW614N chromed	PTFE	Brass	PTFE	12439169
2" [50]	ASME B1.20.1	PN40	Manufacturer standard	Handle	Full bore	CW614N chromed	PTFE	Brass	PTFE	12439170
2.1/2" [65]	ASME B1.20.1	PN30	Manufacturer standard	Handle	Full bore	CW614N chromed	PTFE	Brass	PTFE	12439171
3" [80]	ASME B1.20.1	PN30	Manufacturer standard	Handle	Full bore	CW614N chromed	PTFE	Brass	PTFE	12439172

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.