



ECON® Ball valve Type: 1607ISO Brass Internal thread (BSPP) PN25/40

Characteristics

Type: 1607ISO
Norm: EN (DIN)
Construction type: 2-way
Housing construction: 2-part
Housing material: Brass
Material quality: CW617N
Surface protection: Nickel-plated
Connection: Internal thread (BSPP)
Top flange standard: ISO 5211 Direct Mount
Spindle material: Brass
Primary spindle seal material: PTFE
Secondary spindle seal material: HNBR
Body seal: PTFE
Minimum medium temperature (continuous): 0 °C
Maximum medium temperature (continuous): 130 °C

Application

- HVAC, water and compressed air systems.

Technical Information


- Connections with female threads in accordance with EN 10226-1 (ISO 7/1).
- Ball valve with floating ball.
- With direct-mount top flange in accordance with ISO 5211.
- Version with free shaft end (no actuation).
- Available in sizes ranging from 1/2" to 2".
- Pressure class PN40 for the 1/2" to 1.1/4" versions and PN25 for the 1 1/2" and 2" versions.

Construction

- Two-piece housing construction.
- Design in accordance with EN 13828.
- Full bore.
- Face-to-face dimension according to manufacturer's standard.

Options

- Available with either a pneumatic or electric actuator.
- Position feedback for automated valves.

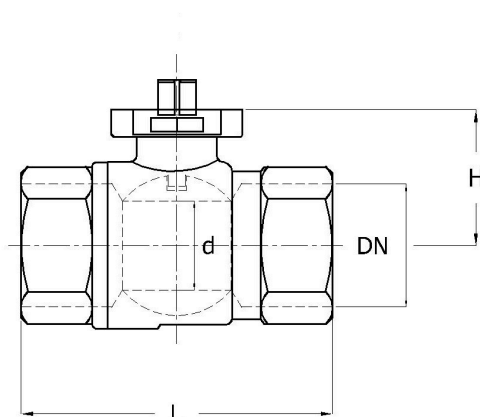

Size table:

DN	d	L	H	Weight
	mm	mm	mm	kg
1/2" [15]	15	75	38	0.22
3/4" [20]	20	80	40.5	0.31
1" [25]	25	90	44	0.54
1.1/4" [32]	32	110	55	0.87
1.1/2" [40]	40	120	61.5	1.16
2" [50]	50	140	73	1.99

Size	Pressure class	Pressure and temperature range			
		-20	90	130	[°C]
1/2" - 1.1/4"	PN40	40	25	16	[bar]
1.1/2" - 2"	PN25	25	15	10	[bar]

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Nominal inner diameter	Standard thread connection	Pressure rating	Face to Face norm	Manual operation	Mounting flange	Mounting flange 2	Bore	Material ball	Seat material	Article
1/2" [15]	ISO 7/1 Rp	PN40	Manufacturer standard	Bare stem	F03		Full bore	CW614N chromed	PTFE	12439157
3/4" [20]	ISO 7/1 Rp	PN40	Manufacturer standard	Bare stem	F03		Full bore	CW614N chromed	PTFE	12439158
1" [25]	ISO 7/1 Rp	PN40	Manufacturer standard	Bare stem	F03	F04	Full bore	CW614N chromed	PTFE	12439159
1.1/4" [32]	ISO 7/1 Rp	PN40	Manufacturer standard	Bare stem	F04	F05	Full bore	CW614N chromed	PTFE	12439160
1.1/2" [40]	ISO 7/1 Rp	PN25	Manufacturer standard	Bare stem	F04	F05	Full bore	CW614N chromed	PTFE	12439161
2" [50]	ISO 7/1 Rp	PN25	Manufacturer standard	Bare stem	F05		Full bore	CW614N chromed	PTFE	12439162

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.