

ASAHI Ball valve Series: 21 Type: 3733 PP Flange PN10



Characteristics

Series: 21
Type: 3733
Construction type: 2-way
Housing construction: 3-part
Housing material: PP
Connection: Flange
Primary spindle seal material: EPDM
Secondary spindle seal material: EPDM
Body seal: EPDM


Actuator material: ABS

Minimum medium temperature (continuous): -20 °C

Maximum medium temperature (continuous): 80 °C

Application

- Recommended in: Chemical

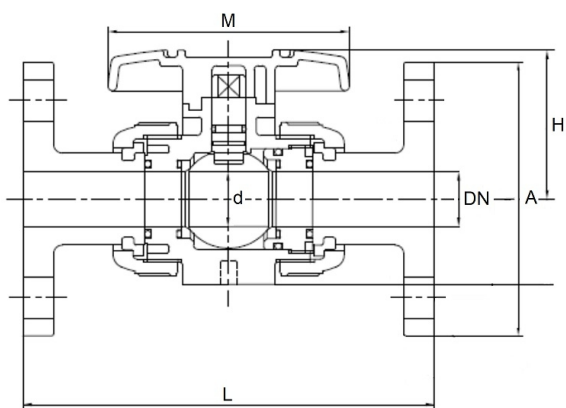

Size table:

DN	d	L	H	M	A	Weight
	mm	mm	mm	mm	mm	kg
DN10	13	120	43.5	80	90	0.2
DN15	15	130	51.5	92	95	0.3
DN20	20	150	59.5	100	105	0.5
DN25	25	160	68	110	115	0.7
DN32	32	180	80.5	121	140	0.9
DN40	40	200	89	131	150	1.2
DN50	51	230	102.5	159	165	1.8
DN65	65	290	126	200	185	2.4
DN80	78	310	140	240	200	3.4
DN100	100	350	178	300	220	7

Nominal inner diameter	External tube diameter of connection	Pressure rating	Face to Face norm	Manual operation	Bore	Material ball	Seat material	Spindle material	Kv value	Article
	mm								m³/h	
DN10	16	PN10	EN 558, Series 1	Handle	Full bore	PP	PTFE	PP	6.6	12478842
DN15	20	PN10	EN 558, Series 1	Handle	Full bore	PP	PTFE	PP	12	12478853
DN20	25	PN10	EN 558, Series 1	Handle	Full bore	PP	PTFE	PP	24.9	12478854
DN25	32	PN10	EN 558, Series 1	Handle	Full bore	PP	PTFE	PP	40.3	12478855
DN32	40	PN10	EN 558, Series 1	Handle	Full bore	PP	PTFE	PP	62.4	12478856
DN40	50	PN10	EN 558, Series 1	Handle	Full bore	PP	PTFE	PP	125.7	12478857
DN50	63	PN10	EN 558, Series 1	Handle	Full bore	PP	PTFE	PP	156.9	12478858
DN65	75	PN10	EN 558, Series 1	Handle	Full bore	PP	PTFE	PP	320	12478859
DN80	90	PN10	EN 558, Series 1	Handle	Full bore	PP	PTFE	PP	430	12478860
DN100	110	PN10	EN 558, Series 1	Handle	Full bore	PP	PTFE	PP	720	12478861

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.