

Fire fighting valve Type: 907 Bronze Inclined Flange

Characteristics

Type: 907
Construction type: Inclined
Housing material: Bronze
Material quality: CC491K [RG5]
Surface protection: Standard manufacturers coating
Connection: Flange
Connection 2: Storz coupling
Flange finish: Flat face
Operation: Hand wheel, rising with rising stem
Type of bonnet: Screwed
Colour: Red, RAL3000
Material disc: Brass
Spindle material: CuZn35Ni [SoMs59]

Material bonnet: CuZn39Pb3 [CW614N]

Material storz coupling: Brass

Actuator material: EN-JL1030


Minimum medium temperature (continuous): -10 °C

Maximum medium temperature (continuous): 60 °C

Maximum pressure difference at 20 °C: 16 bar

Application

- Recommended in: Utilities

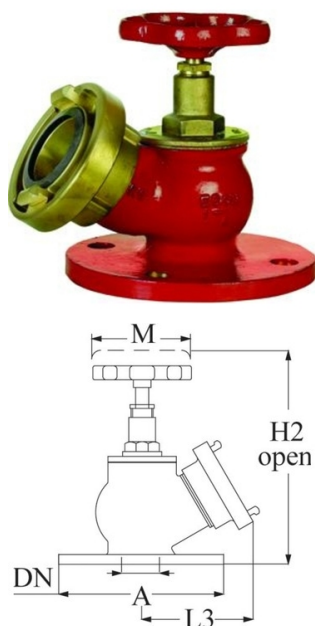

DN	A	L3	H2	M	Lug distance	Weight
mm	mm	mm	mm	mm	mm	kg
25	115	84	140	80	31	1.9
32	140	87	155	80	44	2.9
40	150	100	185	80	51	3.9
50	165	120	195	100	66	5.1
65	185	127	230	120	81	6.4
80	200	157	265	160	89	10.1

Pressure class	Maximum medium temperature
PN16	60 °C

Norm	Nominal inner diameter	Lug distance	Pressure rating	Face to Face length	Sealing	Article
		mm		mm		
EN (DIN)	DN25	31	PN16	888888	NBR	11811749
EN (DIN)	DN32	44	PN16	888888	NBR	11811750
EN (DIN)	DN40	51	PN16	888888	NBR	11811751
EN (DIN)	DN50	66	PN16	888888	NBR	11811752
EN (DIN)	DN65	81	PN16	888888	NBR	11811753
EN (DIN)	DN80	89	PN16	888888	NBR	11811754

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.