


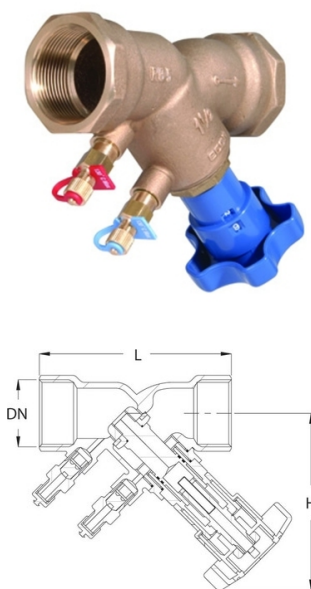

ECON® Regulating valve Type: 2611E Static Bronze Internal thread (BSPP)

Characteristics

Type: 2611E
Housing material: Bronze
Material quality: CC491K
Connection: Internal thread (BSPP)
Type of control gear: Static
Application: CH water
With measuring nipples: Yes
Material disc: Brass
Spindle material: Brass
Material bonnet: CC491K

Nipple material: Brass

Minimum medium temperature (continuous): -10 °C

Maximum medium temperature (continuous): 130 °C

With position indicator: Yes

Application

- Recommended in: Utilities

DN ["]	L mm	H mm	Weight [kg]
3/8	90	77	0,47
1/2	90	90	0,57
3/4	102	90	0,57
1	110	90	0,7
1 1/4	121	116	1,05
1 1/2	142	116	1,35
2	161	116	1,9

Min./Max.	Press./Temp.
Max.oper. press.	25bar
Min. Temperature	-10 °C
Max. temperature	130 °C

Nominal inner diameter	Pressure rating	Control range l/h	Kvs value m³/h	Kv value m³/h	Sealing	Article
3/8" [10]	PN25	90 / 970	0.97	0.09 / 0.97		13491526
1/2" [15]	PN25	370 / 26700	2.67	0.37 / 2.67	PTFE	11815458
3/4" [20]	PN25	400 / 4100	4.1	0.4 / 4.1	PTFE	11815459
1" [25]	PN25	1400 / 6400	6.4	1.4 / 6.4	PTFE	11815460
1.1/4" [32]	PN25	1400 / 12000	12	1.4 / 12	PTFE	11815461
1.1/2" [40]	PN25	2700 / 19500	19.5	2.7 / 19.5	PTFE	11815462
2" [50]	PN25	3900 / 29800	29.8	3.9 / 29.8	PTFE	11815463

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.