



ECON® 3-Way ball valve Type: 7760 Stainless steel Internal thread (BSPP) 1000 PSI WOG



Characteristics

Type: 7760

Norm: EN (DIN)

Construction type: 3-way

Housing material: Stainless steel

Material quality: 1.4408

Connection: Internal thread (BSPP)

Top flange standard: ISO 5211 Direct Mount

Angular rotation: 90 °

Seat material: RPTFE

Spindle material: 1.4401

Primary spindle seal material: PTFE

Secondary spindle seal material: FPM (FKM)

Body seal: PTFE

Actuator material: 1.4301

Minimum medium temperature (continuous): -29 °C

Maximum medium temperature (continuous): 200 °C

Maximum operating pressure [Bar]: 63 bar

Application

- Compressed air, central heating systems, water, fuel and slightly corrosive systems up to a maximum of 68 bar.
- Recommended in: Food & Beverages

Technical Information

- Connection according to ISO 228-1 BSPP.
- Floating ball with L or T bore
- Pressure class 1000 PSI WOG
- In sizes 0.25 inches.
- With "direct mount" top-flange in accordance with ISO-5211.
- Cavity relief bore in the ball.
- Double self-adjusting gland packing in accordance with TA Luft regulations.
- Equipped with lockable lever.
- The 3-way ball valve (floating ball) is intended to be used as a distribution valve. Pressure on the "closed" outlet may lead to leakages at the other outlets (medium).

Construction


- Design in accordance with MSS SP-110.
- Reduced bore.
- Equipped with anti-static design between ball, spindle and housing.

Approval

- TA Luft certified in accordance with VDI 2440, section 3.3.1.3.

Options

- Equipped with worm gearbox and pneumatic, electric or hydraulic actuators.
- Position feedback for manual or automated valves.
- Stainless steel extended spindle, type 8007 for insulation.
- Connection in NPT according to ASME B1.20.1.

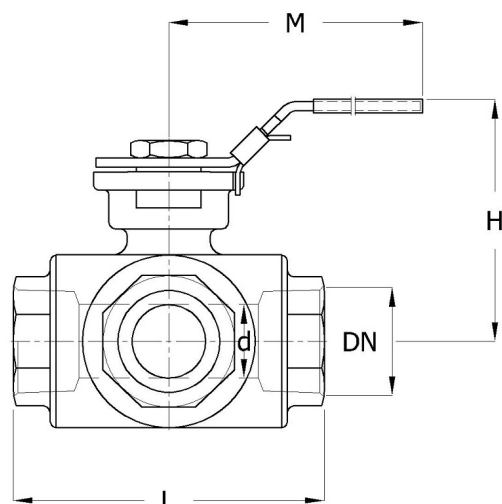

Size table:

DN	d mm	L mm	H mm	M mm	Weight kg
1/4" [8]	11	79	70	147	0.92
3/8" [10]	11	79	70	147	0.8
1/2" [15]	11	79	70	147	0.84
3/4" [20]	15	88	77	147	1.07
1" [25]	20	108	87	176.5	1.92
1.1/4" [32]	25	124	93	176.5	3.01
1.1/2" [40]	32	135	103	215	4.2
2" [50]	40	164	113	215	7.02

Pressure and temperature range

Size	Temperature range	-29	38	100	150	200	[°C]
1/4" - 2"	-29°C/+200°C	68	68	44	22	1	[bar]
Pressure class 1000 PSI WOG							

Nominal inner diameter	Standard thread connection	Pressure rating	Manual operation	Mounting flange	Mounting flange 2	Ball bore	Bore	With locking device	Material ball	Article
1/4" [8]	ISO 228-1	1000 PSI WOG	Handle	F03	F04	L-bore	Reduced bore	Yes	1.4408	11814700
1/4" [8]	ISO 228-1	1000 PSI WOG	Handle	F03	F04	T-bore	Reduced bore	Yes	1.4408	11814708
3/8" [10]	ISO 228-1	1000 PSI WOG	Handle	F03	F04	L-bore	Reduced bore	Yes	1.4408	11814701
3/8" [10]	ISO 228-1	1000 PSI WOG	Handle	F03	F04	T-bore	Reduced bore	Yes	1.4408	11814709
1/2" [15]	ISO 228-1	1000 PSI WOG	Handle	F03	F04	L-bore	Reduced bore	Yes	1.4408	11814702
1/2" [15]	ISO 228-1	1000 PSI WOG	Handle	F03	F04	T-bore	Reduced bore	Yes	1.4408	11814710
3/4" [20]	ISO 228-1	1000 PSI WOG	Handle	F03	F05	T-bore	Reduced bore	Yes	1.4408	11814711
3/4" [20]	ISO 228-1	1000 PSI WOG	Handle	F03	F05	L-bore	Reduced bore	Yes	1.4408	11814703
1" [25]	ISO 228-1	1000 PSI WOG	Handle	F04	F05	T-bore	Reduced bore	Yes	1.4408	11814712
1" [25]	ISO 228-1	1000 PSI WOG	Handle	F04	F05	L-bore	Reduced bore	Yes	1.4408	11814704
1.1/4" [32]	ISO 228-1	1000 PSI WOG	Handle	F04	F07	L-bore	Reduced bore	Yes	1.4408	11814705
1.1/4" [32]	ISO 228-1	1000 PSI WOG	Handle	F04	F07	T-bore	Reduced bore	Yes	1.4408	11814713
1.1/2" [40]	ISO 228-1	1000 PSI WOG	Handle	F05	F07	T-bore	Reduced bore	Yes	1.4408	11814714
1.1/2" [40]	ISO 228-1	1000 PSI WOG	Handle	F05	F07	L-bore	Reduced bore	Yes	1.4408	11814706
2" [50]	ISO 228-1	1000 PSI WOG	Handle	F05	F07	T-bore	Reduced bore	Yes	1.4408	11814715
2" [50]	ISO 228-1	1000 PSI WOG	Handle	F05	F07	L-bore	Reduced bore	Yes	1.4408	11814707

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.