



ECON® Y-filter Type: 1010 Cast iron Internal thread (BSPP)

Characteristics

Type: 1010

Application


- Gases, water, oil and other process fluids

Technical Information

- Horizontal piping
- Vertical piping with downwards flow
- Max. differential pressure 1bar
- Suitable for suction and delivery piping

Options

- Available with other perforations

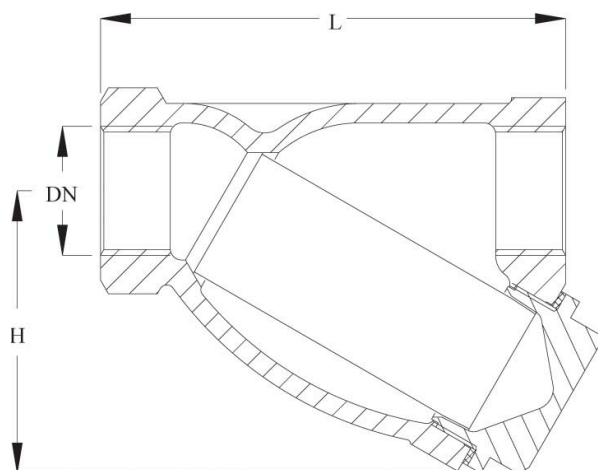

Size table:

DN	H	L	Diameter screen	Height screen	Weight
	mm	mm	mm	mm	kg
3/4" [20]	62	100	28	68	0.8
1" [25]	73	120	36	82	1.1
1.1/2" [40]	98	160	50	114	2.5
2" [50]	144	205	60	154	6.1

Pressure rating

PN10

Maximum medium temperature

200°C

Material quality	Nominal inner diameter	Standard thread connection	Pressure rating	Face to Face length mm	Perforation size mm	With measuring connections	Cover model	With drain plug	Material cover	Article
EN-JL1040	3/4" [20]	ISO 228-1	PN10	100	1	No	Screwed	No	CW617N	EC0101003/4-GIZ2
EN-JL1040	1" [25]	ISO 228-1	PN10	120	1	No	Screwed	No	CW617N	EC010100001-GIZ2
EN-JL1040	1.1/2" [40]	ISO 228-1	PN10	160	1	No	Screwed	No	CW617N	EC0101011/2GIZ2
EN-JL1040	2" [50]	ISO 228-1	PN10	205	1	No	Flanged	No	EN-JL1040	EC010100002-GIZ2

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.