



ECON® Ball valve Type: 7624 Steel Butt weld B16.25 S40 1000 PSI WOG



Characteristics

Type: 7624
Norm: ASME
Construction type: 2-way
Housing construction: 3-part
Housing material: Steel
Material quality: 1.0619
Surface protection: Chemical blackened
Connection: Butt weld
Standard welding connection: B16.25 S40
Top flange standard: ISO 5211 Direct Mount
Material ball: 1.4301
Seat material: PTFE
Spindle material: 1.4401
Primary spindle seal material: PTFE
Secondary spindle seal material: FPM (FKM)
Tertiary spindle seal material: PTFE
Body seal: PTFE
Minimum medium temperature (continuous): -10 °C
Maximum medium temperature (continuous): 205 °C

Application

- Compressed air, central heating systems, water, fuel and slightly corrosive systems up to a maximum of 68 bar.

Technical Information

- Connection according to ASME B16.11 (projection welding) or ASME B16.25, Schedule 40 (butt-welding)
- Floating ball.
- Pressure class 1000 PSI WOG
- In sizes 0.25-4 inches.
- With "direct mount" top-flange in accordance with ISO-5211.
- Cavity relief bore in the ball.
- Double self-adjusting gland packing in accordance with TA Luft regulations.
- Equipped with lockable lever.

Construction


- Three-piece housing construction.
- Design in accordance with MSS SP-110.
- Full bore.
- Equipped with anti-static design between ball, spindle and housing.

Approval

- TA Luft certified in accordance with VDI 2440, section 3.3.1.3.

Options

- Equipped with worm gearbox and pneumatic, electric or hydraulic actuators.
- Position feedback for manual or automated valves.
- Stainless steel housing material, type 7644
- Ball seals in TFM4215
- Stainless steel extended spindle type 8007 for insulation.
- Connection according to ASME B16.11.
- Connection in NPT according to ASME B1.20.1, type 7524
- Connection in BSP according to ISO 228-1, type 7424

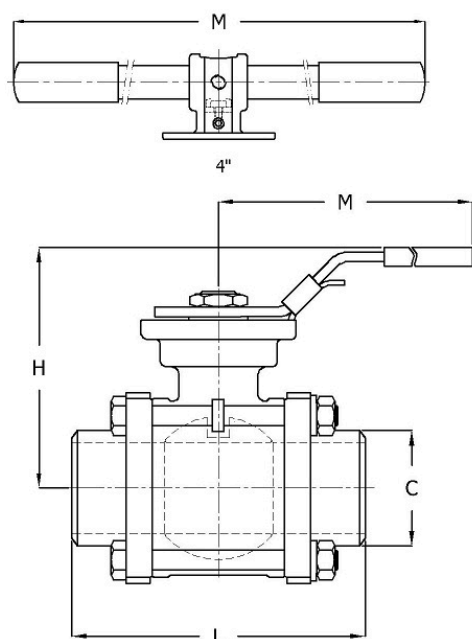

Size table:

DN	d mm	L mm	H mm	M mm	C mm	Weight kg
1/4" [8]	10.6	70	72	145	17.8	0.7
3/8" [10]	12.7	70	72	145	17.8	0.7
1/2" [15]	15	75	72	145	22	0.7
3/4" [20]	20	90	80	145	28.2	0.9
1" [25]	25	100	90	175	34	1.4
1.1/2" [40]	38	125	106	194	50.4	3
2" [50]	50	150	113	194	61.5	4.3
2.1/2" [65]	63.5	190	149	265	77.3	8.3
3" [80]	76	220	159	265	93	11.9

Pressure and temperature range							
Size	Temperature range	-10	38	100	150	200	[°C]
1/4" - 2"	-10°C/+200°C	68	68	44	22	1	[bar]
2.1/2" - 4"	-10°C/+200°C	50	50	32	16	1	[bar]
Pressure class 1000 PSI WOG							

Nominal inner diameter	External tube diameter of connection mm	Wall thickness, connection mm	Pressure rating	Face to Face norm	Manual operation	Mounting flange	Mounting flange 2	Bore	With locking device	Article
1/4" [8]	17.8	4.25	1000 PSI WOG	Manufacturer standard	Handle	F03	F04	Full bore	Yes	13492739
3/8" [10]	17.8	2.65	1000 PSI WOG	Manufacturer standard	Handle	F03	F04	Full bore	Yes	13492740
1/2" [15]	22	3.1	1000 PSI WOG	Manufacturer standard	Handle	F03	F04	Full bore	Yes	13492741
3/4" [20]	28.2	3.6	1000 PSI WOG	Manufacturer standard	Handle	F03	F05	Full bore	Yes	13492742
1" [25]	34	3.65	1000 PSI WOG	Manufacturer standard	Handle	F04	F05	Full bore	Yes	13492743
1.1/2" [40]	50.4	4.75	1000 PSI WOG	Manufacturer standard	Handle	F05	F07	Full bore	Yes	13492745
2" [50]	61.5	4.5	1000 PSI WOG	Manufacturer standard	Handle	F05	F07	Full bore	Yes	13492746
2.1/2" [65]	77.3	7.3	1000 PSI WOG	Manufacturer standard	Handle	F07	F10	Full bore	Yes	13492747
3" [80]	93	7.5	1000 PSI WOG	Manufacturer standard	Handle	F07	F10	Full bore	Yes	13492748

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.