



ECON® Ball valve Type: 7645 Stainless steel Butt welded loose end B16.25 S40 1000 PSI WOG



Characteristics

Type: 7645
Norm: ASME
Construction type: 2-way
Housing construction: 3-part
Housing material: Stainless steel
Material quality: ASTM A351 CF8M
Connection: Butt welded loose end
Standard welding connection: B16.25 S40
Top flange standard: ISO 5211
Bore: Full bore
Material ball: ASTM A351 CF8M
Seat material: TF 4103
Spindle material: ASTM A276 316
Primary spindle seal material: PTFE
Tertiary spindle seal material: PTFE
Body seal: PTFE
Material connection piece: ASTM A351 CF3M
Actuator material: 1.4301
Minimum medium temperature (continuous): -29 °C
Maximum medium temperature (continuous): 200 °C

Application

- Industrial applications up to 68 bar.
- Optional: cold applications, ammonia and CO2 installations, to as low as -40°C.
- Recommended in: Food & Beverages

Technical Information

- Connection according to ASME B16.25, Schedule 40 (butt-welding)
- Floating ball.
- Pressure class 1000 PSI WOG
- In sizes 0.5-3inches
- With top-flange in accordance with ISO 5211.
- Double self-adjusting gland packing
- Equipped with lockable lever and T-wrench for 2.5 and 3inch
- Optional cold application: Shut-off valve with pressure relief hole in "upstream" ball, thus unidirectional (flow arrow on housing), possibly in combination with an extension spindle (type 7645X)

Construction

- Three-piece housing construction.
- Design in accordance with MSS SP-110.
- Full bore.
- Equipped with anti-static design between ball, spindle and housing.

Execution


- Quick-weld model: fast, efficient mounting and positioning after welding via freely rotating butt-weld ends

Approval

- Declaration of conformity according to EC 1935/2004.

Options

- Equipped with worm gearbox and pneumatic, electric or hydraulic actuators.
- Position feedback for manual or automated valves.
- Spindle extension, type 7645X, with "direct-mount" flange on top, suitable for direct mounting of drives

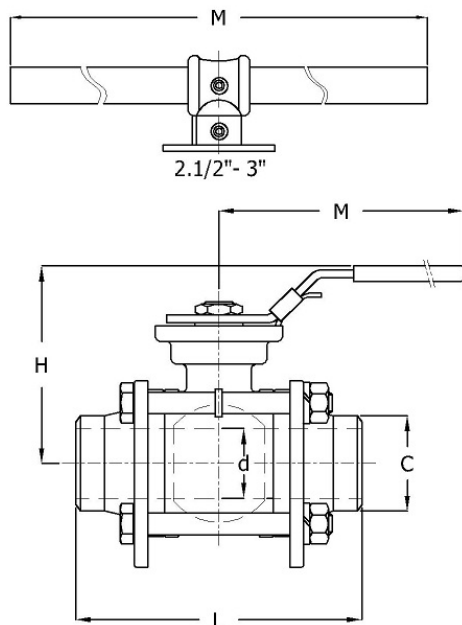

Size table:

DN	d mm	L mm	H mm	M mm	C mm	Weight kg
1/2" [15]	15	73	83	135	22	0.7
3/4" [20]	20	90	88	135	28	0.9
1" [25]	25	100	98	170	34	1.4
1.1/4" [32]	32	110	103	170	43	2.1
1.1/2" [40]	38	125	110	200	50	3
2" [50]	50	150	119	200	61	4.3
2.1/2" [65]	63.5	190	155	250	76	8.3

Pressure and temperature range							
Size	Temperature range	-29	38	100	150	200	[°C]
1/4" - 2"	-29°C/+200°C	68	68	44	22	1	[bar]
2.1/2"	-29°C/+200°C	50	50	32	16	1	[bar]
Pressure class 1000 PSI WOG.							
Optional: low temperature application to -40°C with stem extension and pressure relief hole in the ball.							

Nominal inner diameter	External tube diameter of connection mm	Wall thickness, connection mm	Pressure rating	Face to Face norm	Manual operation	Mounting flange	With locking device	Maximum operating pressure bar	Pressure relief	Article
1/2" [15]	22	3.1	1000 PSI WOG	Manufacturer standard	Handle	F04	Yes	63	No	EC0764501/2-RRWN
1/2" [15]	22	3.1	1000 PSI WOG	Manufacturer standard	Handle	F04	Yes	63	Yes	EC0764501/2-RRWR
3/4" [20]	28	3.55	1000 PSI WOG	Manufacturer standard	Handle	F04	Yes	63	Yes	EC0764503/4-RRWR
1" [25]	34	3.65	1000 PSI WOG	Manufacturer standard	Handle	F05	Yes	63	Yes	EC076450001-RRWR
1" [25]	34	3.65	1000 PSI WOG	Manufacturer standard	Handle	F05	Yes	63	No	EC076450001-RRWN
1.1/4" [32]	43	3.95	1000 PSI WOG	Manufacturer standard	Handle	F05	Yes	63	No	EC0764511/4R-RWN
1.1/4" [32]	43	3.95	1000 PSI WOG	Manufacturer standard	Handle	F05	Yes	63	Yes	EC0764511/4R-RWR
1.1/2" [40]	50	4.55	1000 PSI WOG	Manufacturer standard	Handle	F07	Yes	63	Yes	EC0764511/2R-RWR
1.1/2" [40]	50	4.55	1000 PSI WOG	Manufacturer standard	Handle	F07	Yes	63	No	EC0764511/2R-RWN
2" [50]	61	4.25	1000 PSI WOG	Manufacturer standard	Handle	F07	Yes	63	Yes	EC076450002-RRWR
2" [50]	61	4.25	1000 PSI WOG	Manufacturer standard	Handle	F07	Yes	63	No	EC076450002-RRWN
2.1/2" [65]	76	6.65	1000 PSI WOG	Manufacturer standard	T-wrench	F10	No	51	No	EC0764521/2-RRWN

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.