

ECON® Ball valve Type: 7422FS Steel Fire safe Internal thread (BSPP) Class 600



Characteristics

Type: 7422FS
Norm: ASME
Construction type: 2-way
Housing construction: 3-part
Housing material: Steel
Material quality: ASTM A216 WCB
Surface protection: Chemical blackened
Connection: Internal thread (BSPP)
Top flange standard: ISO 5211 Direct Mount
Material ball: ASTM A351 CF8M
Seat material: TF 4103
Spindle material: ASTM A276 316 Grade S
Primary spindle seal material: RPTFE
Secondary spindle seal material: FPM (FKM)
Tertiary spindle seal material: Graphite
Body seal: Graphite
Material connection piece: ASTM A216 WCB
Minimum medium temperature (continuous): -29 °C
Maximum medium temperature (continuous): 220 °C
Fire safe: Yes

Application

- Industrial and maritime applications.
- Liquid and gaseous media.
- Recommended in: Chemical

Technical Information

- Connection according to ISO 228-1 BSPP.
- Floating ball.
- Pressure class: Class 600.
- With direct-mount top flange according to ISO 5211.
- Closed neck design with leak detection opening.
- Equipped with a robust lever.
- Average temperature for a tap with standard TF 4103 seats: -29°C/+220°C. Up to a maximum of 250° C for taps with TF 4215 seats.

Construction


- Three-part housing construction.
- Wall thickness according to EN 12516-1 and ASME B16.34.
- Full or reduced bore.
- Design with antistatic equipment between ball and housing.

Approval

- Fire-safe according to ISO 10497 (third edition) and API 607 (seventh edition).
- Type approval from Lloyd's Register.
- Safety integrity level (SIL) 2.

Options

- Design with worm gearbox, pneumatic, electric or hydraulic drives.
- Position feedback for manual and automatic valves.
- Available with different seat materials such as TF 4215, TFM 1600 and PEEK.
- Fire-safe design available.
- Stainless steel extended spindle for insulation.
- With connection for earthing.
- With 30°, 60° or 90° V-shaped ball bore for modulating applications.
- Connections with NPT thread according to ASME B1.20.1, socket weld according to ASME B16.11 or EN 12760, and butt weld according to ASME B16.25 S40 or EN 12627.

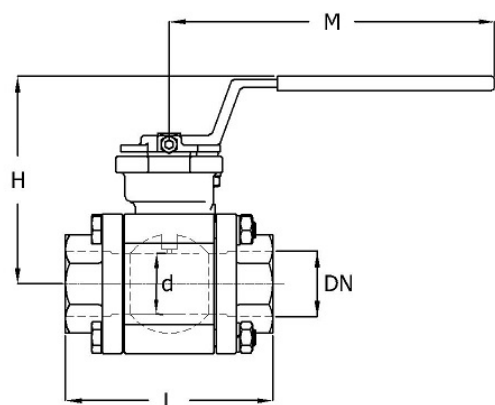

Size table:

DN	Full bore	d mm	L mm	H mm	M mm	Weight kg
1/4" [8]	Yes	15	71	83	140	0.9
3/8" [10]	Yes	15	71	83	140	0.9
1/2" [15]	Yes	15	72	83	140	1
3/4" [20]	Yes	20	97	88	140	1.5
1" [25]	Yes	25	109	97	190	2
1.1/2" [40]	Yes	38	129	148	290	4.5
2" [50]	Yes	50	145	157	290	6.5

Pressure and temperature range							
Seat material + DN full bore	-29	50	100	150	200	250	[°C]
TF4103 & TFM1600 1/4" - 1"	102.1	100.2	68	34	0	-	[bar]
TF4215 1/4" - 1"	102.1	100.2	93.2	63	32	0	[bar]
TF4103 & TFM1600 1.1/4" - 1.1/2"	80	80	55	28	0	-	[bar]
TF4215 1.1/4" - 1.1/2"	80	80	80	55	28	0	[bar]
TF4103 & TFM1600 2"	76	76	53	27	0	-	[bar]
TF4215 2"	76	76	76	51	25	0	[bar]

Nominal inner diameter	Standard thread connection	Pressure rating	Face to Face norm	Manual operation	Mounting flange	Mounting flange 2	Bore	With locking device	Maximum operating pressure bar	Article
1/4" [8]	ISO 228-1	Class 600	Manufacturer standard	Handle	F03	F04	Full bore	No	102	13708502
3/8" [10]	ISO 228-1	Class 600	Manufacturer standard	Handle	F03	F04	Full bore	No	102	13708513
1/2" [15]	ISO 228-1	Class 600	Manufacturer standard	Handle	F03	F04	Full bore	No	102	13559651
3/4" [20]	ISO 228-1	Class 600	Manufacturer standard	Handle	F03	F04	Full bore	No	102	13559652
1" [25]	ISO 228-1	Class 600	Manufacturer standard	Handle	F04	F05	Full bore	No	102	13559663
1.1/2" [40]	ISO 228-1	Class 600	Manufacturer standard	Handle	F07		Full bore	No	80	13559665
2" [50]	ISO 228-1	Class 600	Manufacturer standard	Handle	F07		Full bore	No	76	13559666

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.