




ECON® Glass tube thermometer fig. 1645 aluminum small size model

Characteristics

Type: 1645
Model: Small (110 mm)
Construction type: Straight
Connection location: Below
Process connection: External thread
Housing material: Aluminium
Max. operating pressure: 16 bar
Surface protection: Anodized

Application

- Recommended in: Machine Construction, Utilities

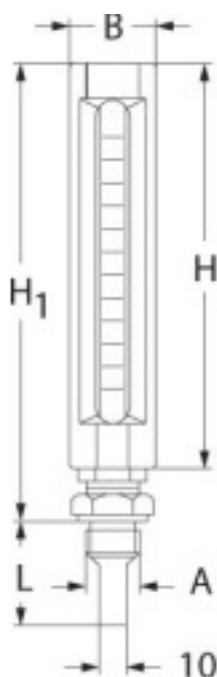

Size table:

L	G	B	ØD	H	H1
mm		mm	mm	mm	mm
30-40-50 63-100-160	1/2"	30	10	110	130

Measuring range °C	Size process connection	Insert length mm	Process connection material	TMA - maximum allowable temperature °C	Article
-30 / 50	1/2" BSPP(G)	40	Brass	50	EC01645ABBCCA11C
-30 / 50	1/2" BSPP(G)	50	Brass	50	EC01645CBBCCA11C
0 / 100	1/2" BSPP(G)	30	Brass	100	EC016453BBECA11C
0 / 100	1/2" BSPP(G)	50	Brass	100	492178
0 / 100	1/2" BSPP(G)	63	Brass	100	EC01645DBBECA11C
0 / 100	1/2" BSPP(G)	100	Brass	100	EC01645GBBECA11C
0 / 120	1/2" BSPP(G)	40	Brass	120	EC01645ABBFCA11C
0 / 120	1/2" BSPP(G)	50	Brass	120	EC01645CBBFCA11C
0 / 120	1/2" BSPP(G)	63	Brass	120	EC01645DBBFCA11C
0 / 120	1/2" BSPP(G)	100	Brass	120	EC01645GBBFCA11C

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.