



ERIKS V-ring type S



The ERIKS V-ring type S with a slanted rear face is used as an axial shaft seal for pressureless applications. The seal is a tight fit around the shaft in your application. The flexible sealing lip seals against a machined surface perpendicular to the shaft. You use this product to keep dirt, dust and splashing water out of your system. Compared to a seal with an upright rear face, the slanted rear face results in a slightly tighter fit on the shaft. This V-ring seal is available in CR, EPDM, FKM and NBR. Note that NBR is not resistant to UV radiation and ozone. So if you want to use this V-ring seal in an outdoor application, you are advised to choose a different material. Are you looking for a smaller product? Choose the ERIKS V-ring type A or L. If you need the opposite, i.e. an extremely large seal, the type E is a good option.

Characteristics

Type: S

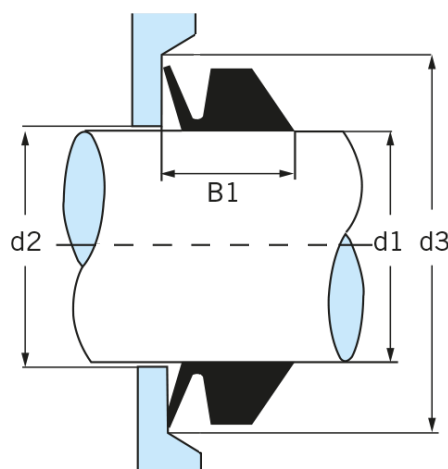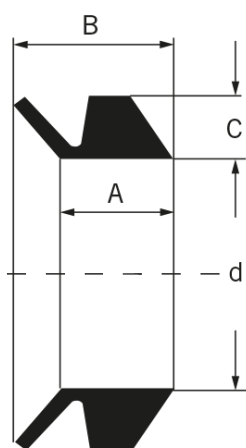



Size table:

Designation	d1	d	C	A	B	d2 (max)	d3 (min)	B1
	mm	mm	mm	mm	mm	mm	mm	mm
V-5S	4.5 - 5.5	4	2	3.9	5.2	d1+ 1	d1+ 6	4.5 ± 0.4
V-6S	5.5 - 6.5	5	2	3.9	5.2	d1+ 1	d1+ 6	4.5 ± 0.4
V-7S	6.5 - 8.0	6	2	3.9	5.2	d1+ 1	d1+ 6	4.5 ± 0.4
V-8S	8.0 - 9.5	7	2	3.9	5.2	d1+ 1	d1+ 6	4.5 ± 0.4
V-10S	9.5 - 11.5	9	3	5.6	7.7	d1+ 2	d1+ 9	6.7 ± 0.6
V-12S	11.5 - 13.5	10.5	3	5.6	7.7	d1+ 2	d1+ 9	6.7 ± 0.6
V-14S	13.5 - 15.5	12.5	3	5.6	7.7	d1+ 2	d1+ 9	6.7 ± 0.6
V-16S	15.5 - 17.5	14	3	5.6	7.7	d1+ 2	d1+ 9	6.7 ± 0.6
V-18S	17.5 - 19.0	16	3	5.6	7.7	d1+ 2	d1+ 9	6.7 ± 0.6
V-20S	19 - 21	18	4	7.9	10.5	d1+ 2	d1+12	9.0 ± 0.8
V-22S	21 - 24	20	4	7.9	10.5	d1+ 2	d1+12	9.0 ± 0.8
V-25S	24 - 27	22	4	7.9	10.5	d1+ 2	d1+12	9.0 ± 0.8
V-28S	27 - 29	25	4	7.9	10.5	d1+ 3	d1+12	9.0 ± 0.8
V-30S	29 - 31	27	4	7.9	10.5	d1+ 3	d1+12	9.0 ± 0.8

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Size table:

Designation	d1	d	C	A	B	d2 [max]	d3 [min]	B1
V-32S	31 - 33	29	4	7.9	10.5	d1+ 3	d1+12	9.0 ± 0.8
V-35S	33 - 36	31	4	7.9	10.5	d1+ 3	d1+12	9.0 ± 0.8
V-38S	36 - 38	34	4	7.9	10.5	d1+ 3	d1+12	9.0 ± 0.8
V-40S	38 - 43	36	5	9.5	13	d1+ 3	d1+15	11.0 ± 1.0
V-45S	43 - 48	40	5	9.5	13	d1+ 3	d1+15	11.0 ± 1.0
V-50S	48 - 53	45	5	9.5	13	d1+ 3	d1+15	11.0 ± 1.0
V-55S	53 - 58	49	5	9.5	13	d1+ 3	d1+15	11.0 ± 1.0
V-60S	58 - 63	54	5	9.5	13	d1+ 3	d1+15	11.0 ± 1.0
V-65S	63 - 68	58	5	9.5	13	d1+ 3	d1+15	11.0 ± 1.0
V-70S	68 - 73	63	6	11.3	15.5	d1+ 4	d1+18	13.5 ± 1.2
V-75S	73 - 78	67	6	11.3	15.5	d1+ 4	d1+18	13.5 ± 1.2
V-80S	78 - 83	72	6	11.3	15.5	d1+ 4	d1+18	13.5 ± 1.2
V-85S	83 - 88	76	6	11.3	15.5	d1+ 4	d1+18	13.5 ± 1.2
V-90S	88 - 93	81	6	11.3	15.5	d1+ 4	d1+18	13.5 ± 1.2
V-95S	93 - 98	85	6	11.3	15.5	d1+ 4	d1+18	13.5 ± 1.2
V-100S	98 - 105	90	6	11.3	15.5	d1+ 4	d1+18	13.5 ± 1.2
V-110S	105 - 115	99	7	13.1	18	d1+ 4	d1+21	15.5 ± 1.5
V-120S	115 - 125	108	7	13.1	18	d1+ 4	d1+21	15.5 ± 1.5
V-130S	125 - 135	117	7	13.1	18	d1+ 4	d1+21	15.5 ± 1.5
V-140S	135 - 145	126	7	13.1	18	d1+ 4	d1+21	15.5 ± 1.5
V-150S	145 - 155	135	7	13.1	18	d1+ 4	d1+21	15.5 ± 1.5
V-160S	155 - 165	144	8	15	20.5	d1+ 5	d1+24	18.0 ± 1.8
V-170S	165 - 175	153	8	15	20.5	d1+ 5	d1+24	18.0 ± 1.8
V-180S	175 - 185	162	8	15	20.5	d1+ 5	d1+24	18.0 ± 1.8
V-190S	185 - 95	171	8	15	20.5	d1+ 5	d1+24	18.0 ± 1.8
V-199S	195 - 210	180	8	15	20.5	d1+ 5	d1+24	18.0 ± 1.8

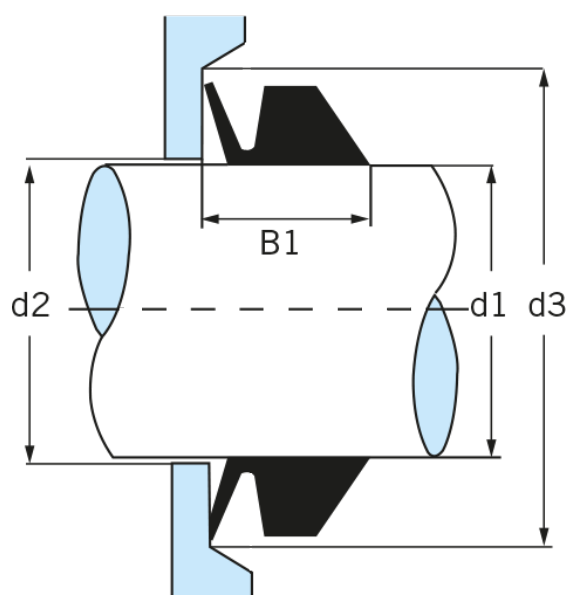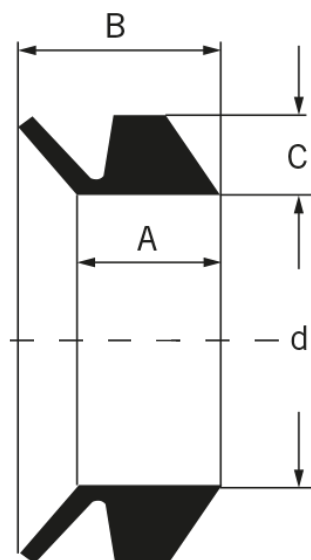

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Designation	Material	Temperature °C	Article
V-5S	NBR	-35 / 100	V0005S-NBR
V-6S	NBR	-35 / 100	V0006S-NBR
V-7S	NBR	-35 / 100	V0007S-NBR
V-8S	NBR	-35 / 100	V0008S-NBR
V-10S	NBR	-35 / 100	V0010S-NBR
V-12S	NBR	-35 / 100	V0012S-NBR
V-14S	NBR	-35 / 100	V0014S-NBR
V-16S	NBR	-35 / 100	V0016S-NBR
V-18S	NBR	-35 / 100	V0018S-NBR
V-20S	NBR	-35 / 100	V0020S-NBR
V-22S	NBR	-35 / 100	V0022S-NBR
V-25S	NBR	-35 / 100	V0025S-NBR
V-28S	NBR	-35 / 100	V0028S-NBR
V-30S	NBR	-35 / 100	V0030S-NBR
V-32S	NBR	-35 / 100	V0032S-NBR
V-35S	NBR	-35 / 100	V0035S-NBR
V-38S	NBR	-35 / 100	V0038S-NBR
V-40S	NBR	-35 / 100	V0040S-NBR
V-45S	NBR	-35 / 100	V0045S-NBR
V-50S	FKM	-25 / 200	V0050S-FKM
V-50S	NBR	-35 / 100	V0050S-NBR
V-55S	NBR	-35 / 100	V0055S-NBR
V-60S	NBR	-35 / 100	V0060S-NBR
V-65S	NBR	-35 / 100	V0065S-NBR
V-70S	NBR	-35 / 100	V0070S-NBR
V-75S	NBR	-35 / 100	V0075S-NBR
V-80S	NBR	-35 / 100	V0080S-NBR
V-85S	NBR	-35 / 100	V0085S-NBR
V-90S	NBR	-35 / 100	V0090S-NBR
V-95S	NBR	-35 / 100	V0095S-NBR
V-100S	NBR	-35 / 100	V0100S-NBR
V-110S	NBR	-35 / 100	V0110S-NBR
V-120S	NBR	-35 / 100	V0120S-NBR
V-130S	NBR	-35 / 100	V0130S-NBR
V-140S	NBR	-35 / 100	V0140S-NBR
V-150S	NBR	-35 / 100	V0150S-NBR
V-160S	NBR	-35 / 100	V0160S-NBR
V-170S	NBR	-35 / 100	V0170S-NBR
V-180S	NBR	-35 / 100	V0180S-NBR
V-190S	NBR	-35 / 100	V0190S-NBR
V-199S	NBR	-35 / 100	V0199S-NBR

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.