

ECON® Oil position indicator fig. 595 brass

Characteristics

Type: 595

Housing material: Brass

Pressure rating: PN10

Material glass: Soda-lime glass

Lockable: No


With drain: Yes

With de-aeration: No

Self-locking: No

Self-venting: No

Maximum medium temperature (continuous): 150 °C

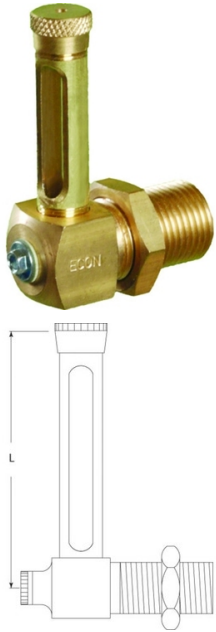

| Connection [BSP] | Glass length [mm] |
|------------------|---------------------------|
| 1/4", 3/8", 1/2" | 40, 60, 80, 100, 125, 150 |

| Model | Connection | Nominal inner diameter | Height mm | Article |
|-------------|------------------------|------------------------|-----------|-------------|
| Lower block | External thread (BSPP) | 1/2" (15) | | EC00595X1/2 |
| Lower block | External thread (BSPP) | 1/4" (8) | | EC00595X1/4 |
| Lower block | External thread (BSPP) | 3/8" (10) | | EC00595X3/8 |
| Top part | External thread (BSPP) | | 100 | EC00595X100 |
| Top part | External thread (BSPP) | | 150 | EC00595X150 |

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.