



ECON® Bimetal thermometer fig. 30000 stainless steel/ stainless steel insert

Characteristics

Type: 30000

Accuracy class: Class 1 EN 13190

Connection location: Back

Process connection: External thread

With pocket tube: Yes

Cabinet material: Stainless steel 304

Window material: Glass

Material dial: Aluminium


Maximum operating pressure [Bar]: 40 bar

Level of protection (IP value): IP43

Application

- General industry.

Size table:

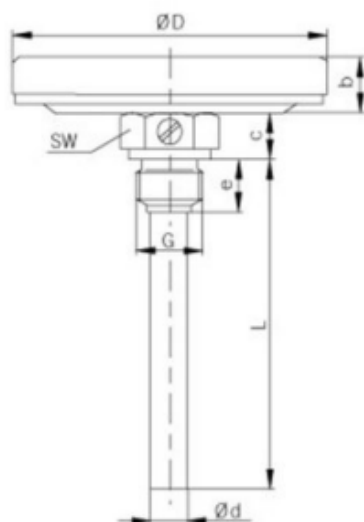

ØD	b	c	d	e	SW	G
mm	mm	mm	mm	mm	mm	in
63	13	14	10	14	27	1/2"

Measuring range	Cabinet diameter	Size process connection	Insert length	Sensor diameter	Diameter pocket tube	Ring material	Process connection material	Sensor material	Pocket tube material	Article
°C	mm		mm	mm	mm					
0 / 120	63	1/2" BSPP[G]	63	8	10	Stainless steel	Stainless steel	Stainless steel	Stainless steel	685197

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.