



ECON® Bimetal thermometer fig. 23000 steel/brass insert

Characteristics

Type: 23000

Accuracy class: Class 1.6 EN 13190

Connection location: Below

Process connection: External thread

With pocket tube: Yes


Cabinet material: Steel, galvanized

Window material: Glass

Material dial: Aluminium

Maximum operating pressure [Bar]: 25 bar

Level of protection [IP value]: IP43

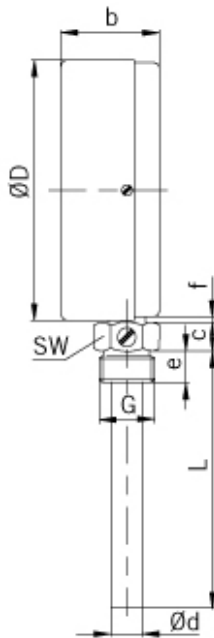

Size table:

Cabinet diameter	ØD	L	b	c	d	e	SW	G
	mm	mm	mm	mm	mm	mm	mm	in
R63	63	100	36	11	12	12	21	1/2"
R100	100	63	38	11	12	12	21	1/2"

Measuring range	Cabinet diameter	Size process connection	Insert length	Sensor diameter	Diameter pocket tube	Ring material	Process connection material	Sensor material	Pocket tube material	Article
°C	mm		mm	mm	mm					
0 / 120	63	1/2" BSPP[G]	100	9	12	Steel chromium-plated	Brass	Brass	Brass	685188
0 / 120	100	1/2" BSPP[G]	63	9	12	Steel chromium-plated	Brass	Brass	Brass	685179

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.