



ECON® Diaphragm drum pressure gauge Type 383 stainless steel bottom connection brass

Characteristics

Type: 383

Pressure unit secondary scale: mmwc (mm water column)

Accuracy class: 1.6 %

Pressure gauge attachment: Direct

Connection location: Below

Process connection: External thread

Cabinet material: Stainless steel

Characteristics [2]

Process connection material: Brass

Material dial: Aluminium


Protection class: IP54

Medium temperature: -20 / 60 °C


Ambient temperature: -20 / 60 °C

Size table:

Cabinet diameter	G	a	b	D	D2	e	SW	Weight
		mm	mm	mm	mm	mm	mm	kg
R100	1/2"	15.5	49.5	101	99	17.5	22	0.5

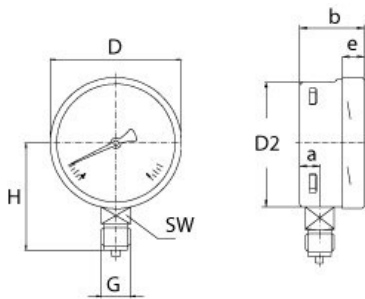

100 / 160 mm

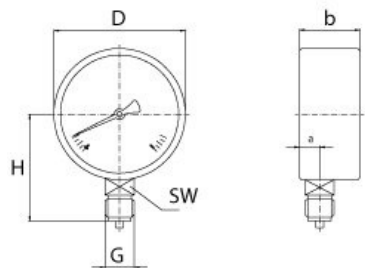

63 mm

Cabinet diameter	Measuring range	Pressure unit	Secondary scale division	Size process connection	Window material	Maximum overpressure	Article
mm						mbar	
100	0 / 40	mbar	0 - 400	1/2" BSPP(G)	Glass	400	EC003832E2C1120
100	0 / 100	mbar	0 - 1000	1/2" BSPP(G)	Glass	1000	EC003832G2C1120

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.