

LVF Check valve Type: 1732 Steel Socket weld Class 800

Forged steel check valve, piston type, with bolted cover and socket weld ends, Class 800.



Characteristics

Type: 1732

Norm: ASME

Construction type: Straight

Housing material: Steel

Material quality: ASTM A105N

Surface protection: Phosphated

Connection: Socket weld

Standard welding connection: ASME B16.11

Face to Face norm: Manufacturer standard

With spring: Yes

Maximum medium temperature (continuous): 426 °C

Maximum pressure difference at 20 °C: 136 bar

Application

- Refineries and (petro-) chemical process installations.
- Oil & gas industry.
- Steam and oil.
- Neutral liquids and gases.
- Recommended in: Chemical, Petrochemical and Refining

Technical Information


- Design: API602, ASME B16.34.
- Testing: API598.
- Emission standard: API 624.
- NACE MR01-75, MR01-03.

Options

- Available in stainless steel; type 1722.
- Available with NPT thread connections; type 1730.
- Available in Class 1500.
- Available in other materials.
- Available for cryogenic or high temperature applications.

Size table:

DN	H	L	Weight
	mm	mm	kg
1/2" [15]	49	80	1.1
3/4" [20]	55	90	1.8
1" [25]	70	110	2.6
1.1/2" [40]	105	155	5.5
2" [50]	120	170	8.4

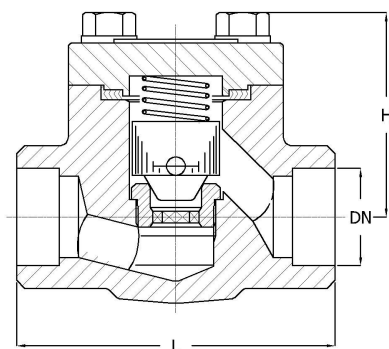

Pressure and temperature table

-29/38	50	100	150	200	250	300	350	400	425	450	500	538	[°C]
--------	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Pressure and temperature table													
136.2	133.7	124.3	120.2	116.8	106.2	103.2	100.2	92.6	76.7	61.3	31.4	15.7	[bar]
ASTM A105N is not recommended for long-term use above 425 °C.													
Check the above values and any additional comments with API602.													

Nominal inner diameter	Pressure rating	Face to Face length mm	Valve shape	Sealing	Material disc	Material cover	Material cover gasket	Spring material	Minimum medium temperature (continuous) °C	Article
1/2" [15]	Class 800	80	Flap	Trim 8	ASTM A479 410	ASTM A105N	Stainless steel 316 SW Graphite filled	ASTM A479 316	-29	13615033
3/4" [20]	Class 800	90	Flap	Trim 8	ASTM A479 410	ASTM A105N	Stainless steel 316 SW Graphite filled	ASTM A479 316	-29	13615034
1" [25]	Class 800	110	Flap	Trim 8	ASTM A479 410	ASTM A105N	Stainless steel 316 SW Graphite filled	ASTM A479 316	-29	13615035
1.1/2" [40]	Class 800	155	Flap	Trim 8	ASTM A479 410	ASTM A105N	Stainless steel 316 SW Graphite filled	ASTM A479 316	-29	13615036
2" [50]	Class 800	170	Flap	Trim 8	ASTM A479 410	ASTM A105N	Stainless steel 316 SW Graphite filled	ASTM A479 316	-29	13615037

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.