

ECON® Ball valve Type: 7524 Steel Internal thread (NPT) 1000 PSI WOG



Characteristics

- Type:** 7524
- Norm:** ASME
- Construction type:** 2-way
- Housing construction:** 3-part
- Housing material:** Steel
- Material quality:** 1.0619
- Surface protection:** Chemical blackened
- Connection:** Internal thread (NPT)
- Top flange standard:** ISO 5211 Direct Mount
- Seat material:** PTFE
- Spindle material:** 1.4401
- Primary spindle seal material:** PTFE
- Secondary spindle seal material:** FPM (FKM)
- Tertiary spindle seal material:** PTFE
- Body seal:** PTFE
- Minimum medium temperature (continuous):** -10 °C
- Maximum medium temperature (continuous):** 205 °C

Application

- Compressed air, central heating systems, water, fuel and slightly corrosive systems up to a maximum of 68 bar.

Technical Information

- Connection according to ASME B1.20.1 NPT.
- Floating ball.
- Pressure class 1000 PSI WOG
- In sizes 0.25-4 inches.
- With "direct mount" top-flange in accordance with ISO-5211.
- Cavity relief bore in the ball.
- Double self-adjusting gland packing in accordance with TA Luft regulations.
- Equipped with lockable lever.

Construction


- Three-piece housing construction.
- Design in accordance with MSS SP-110.
- Full bore.
- Equipped with anti-static design between ball, spindle and housing.

Approval

- TA Luft certified in accordance with VDI 2440, section 3.3.1.3.

Options

- Equipped with worm gearbox and pneumatic, electric or hydraulic actuators.
- Position feedback for manual or automated valves.
- Stainless steel housing material, type 7544
- Ball seals in TFM4215
- Stainless steel extended spindle type 8007 for insulation.
- Connection in BSP according to ISO 228-1, type 7424
- Connection in projection welding acc. to B16.11 or butt welding acc. to B16.25, Schedule 40, type 7624

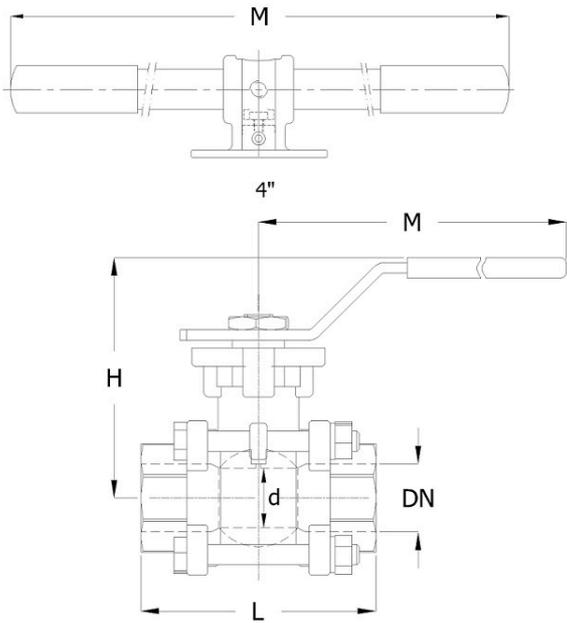

Size table:

DN	d mm	L mm	H mm	M mm	Weight kg
1/4" [8]	10.6	75	72	147	0.6
3/8" [10]	12.7	75	72	147	0.6
1/2" [15]	15	75	72	147	0.7
3/4" [20]	20	80	79	147	0.9
1" [25]	25	90	89	177	1.4
1.1/4" [32]	32	110	93	177	2
1.1/2" [40]	38	120	103	197	3
2" [50]	50	140	110	197	4.3
2.1/2" [65]	63.5	185.5	150	267	8.2
3" [80]	76	205	159	267	11.2
4" [100]	100	240	212	400	22.1

Pressure and temperature range							
Size	Temperature range	-10	38	100	150	200	[°C]
1/4" - 2"	-10°C/+200°C	68	68	44	22	1	[bar]
2.1/2" - 4"	-10°C/+200°C	50	50	32	16	1	[bar]
Pressure class 1000 PSI WOG							

Nominal inner diameter	Standard thread connection	Pressure rating	Face to Face norm	Manual operation	Mounting flange	Mounting flange 2	Bore	With locking device	Material ball	Article
1/4" [8]	ASME B1.20.1	1000 PSI WOG	Manufacturer standard	Handle	F03	F04	Full bore	Yes	1.4301	13467670
3/8" [10]	ASME B1.20.1	1000 PSI WOG	Manufacturer standard	Handle	F03	F04	Full bore	Yes	1.4301	13467671
1/2" [15]	ASME B1.20.1	1000 PSI WOG	Manufacturer standard	Handle	F03	F04	Full bore	Yes	1.4301	13467672
3/4" [20]	ASME B1.20.1	1000 PSI WOG	Manufacturer standard	Handle	F03	F05	Full bore	Yes	1.4301	13467673
1" [25]	ASME B1.20.1	1000 PSI WOG	Manufacturer standard	Handle	F04	F05	Full bore	Yes	1.4301	13467674
1.1/4" [32]	ASME B1.20.1	1000 PSI WOG	Manufacturer standard	Handle	F04	F07	Full bore	Yes	1.4301	13467675
1.1/2" [40]	ASME B1.20.1	1000 PSI WOG	Manufacturer standard	Handle	F05	F07	Full bore	Yes	1.4301	13467676
2" [50]	ASME B1.20.1	1000 PSI WOG	Manufacturer standard	Handle	F05	F07	Full bore	Yes	1.4301	13467677
2.1/2" [65]	ASME B1.20.1	1000 PSI WOG	Manufacturer standard	Handle	F07	F10	Full bore	Yes	1.4301	13467678
3" [80]	ASME B1.20.1	1000 PSI WOG	Manufacturer standard	Handle	F07	F10	Full bore	Yes	1.4301	13467679
4" [100]	ASME B1.20.1	1000 PSI WOG	Manufacturer standard	T-wrench	F10		Full bore	No	1.4301	13467680

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.