



ASAHI Diaphragm valve Series: 14 Type: 3761 PVC-U Glued sleeve PN10

Characteristics

Series: 14

Type: 3761

Housing construction: A (Weir type)

Housing material: PVC-U


Connection: Glued sleeve

Face to Face norm: Manufacturer standard

Manual operation: Hand wheel

Application

- Recommended in: Chemical

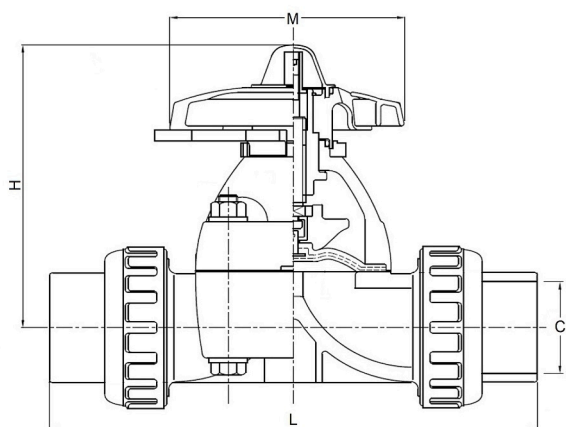

Size table:

C	L	H	M	Weight
mm	mm	mm	mm	kg
20	128	104	100	0.5
25	147	111	100	0.6
32	172	111	100	0.9
40	188	116	100	1.1
50	246	177	156	2.6
63	294	191	156	2.9

Membrane material	External tube diameter of connection	Nominal inner diameter	Pressure rating	Face to Face length	Material bonnet	Actuator material	Minimum medium temperature (continuous)	Maximum medium temperature (continuous)	Kv value	Article
	mm			mm			°C	°C	m³/h	
EPDM	20	DN15	PN10	128	PVC-U	PP	0	60	4.1	12478701
EPDM	25	DN20	PN10	147	PVC-U	PP	0	60	4.6	12478702
EPDM	32	DN25	PN10	172	PVC-U	PP	0	60	7.3	12478703
EPDM	40	DN32	PN10	188	PVC-U	PP	0	60	9.5	12478704
EPDM	50	DN40	PN10	246	PVC-U	PP	0	60	22.5	12478705
EPDM	63	DN50	PN10	294	PVC-U	PP	0	60	37.2	12478706
PTFE	20	DN15	PN10	128	PVC-U	PP	0	60	4.1	12478708
PTFE	25	DN20	PN10	147	PVC-U	PP	0	60	4.6	12478709
PTFE	32	DN25	PN10	172	PVC-U	PP	0	60	7.3	12478710
PTFE	40	DN32	PN10	188	PVC-U	PP	0	60	9.5	12478711
PTFE	50	DN40	PN10	246	PVC-U	PP	0	60	22.5	12478712
PTFE	63	DN50	PN10	294	PVC-U	PP	0	60	37.2	12478713

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.