



ASAHI Diaphragm valve Series: 14 Type: 3770 PVDF-EL Plastic welded sleeve PN10

This is a dual-use or controlled item. When exporting this item outside the EU an export license is required from the regulatory authorities.

Characteristics

Series: 14

Type: 3770

Housing construction: A (Weir type)

Housing material: PVDF-EL


Connection: Plastic welded sleeve

Face to Face norm: Manufacturer standard

Manual operation: Hand wheel

Application

- Recommended in: Chemical

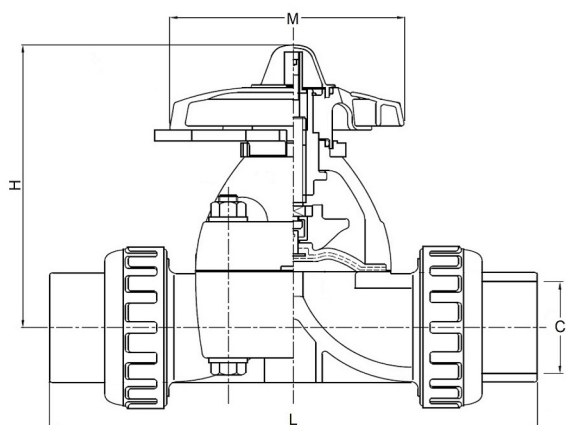

Size table:

C	L	H	M	Weight
mm	mm	mm	mm	kg
20	125	104	100	0.6
25	141	111	100	0.7
32	164	111	100	1
40	177	116	100	1.2
50	231	177	156	2.7
63	274	191	156	3.1

Membrane material	External tube diameter of connection	Pressure rating	Face to Face length	Material bonnet	Actuator material	Minimum medium temperature (continuous)	Maximum medium temperature (continuous)	Kv value	Article
	mm		mm			°C	°C	m³/h	
PTFE-EL	20	PN10	125	PPG	PP	-40	120	4.1	12478887
PTFE-EL	25	PN10	141	PPG	PP	-40	120	4.6	12478888
PTFE-EL	32	PN10	164	PPG	PP	-40	120	7.3	12478889
PTFE-EL	40	PN10	177	PPG	PP	-40	120	9.5	12478890
PTFE-EL	50	PN10	231	PPG	PP	-40	120	22.5	12478891
PTFE-EL	63	PN10	274	PPG	PP	-40	120	37.2	12478892

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.