



ECON® Pressure spring thermometer fig. 3531 stainless steel insert rear connection


Characteristics

- Type:** 3531
- Accuracy class:** 1.0 %
- Connection location:** Back
- Cabinet diameter:** 100 mm
- Process connection:** External thread [BSPP]
- Size process connection:** 1/2" [15]
- Process connection material:** Stainless steel 304
- Cabinet material:** Stainless steel 304
- Window material:** Glass

- Material dial:** Aluminium
- Material mechanism:** Brass
- Material sensor:** Stainless steel 321 [1.4541]
- Pocket tube material:** Stainless steel 321 [1.4541]
- Level of protection (IP value):** IP54

Application

- Recommended in: Chemical

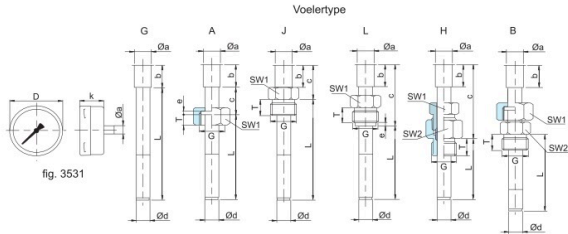

Size table:

Sensor type	Insert length	G	B	C	D	d	L	SW1	SW2
	mm		mm	mm	mm	mm	mm	mm	mm
A10A	250	1/2"	45	65	101	125	250	27	22
A10A	63	1/2"	45	65	101	15	63	27	22
A10A	100	1/2"	45	65	101	125	100	27	22

Overview of optional probe types and process connections according to DIN16189

Sensor type	Description of the sensor and connection
G	Plain stem sensor AISI321.
A	Coupling nut AISI304, sensor AISI321.
A10A	Coupling nut and pocket tube with male threading.
J	Fixed nipple (external thread), sensor AISI321.
L	Turning nipple (external thread), sensor AISI321.
H	Adjustable connection sliding on stem, sensor AISI321.
B	Coupling nut and double nipple AISI304, sensor AISI321.
N	Tri-clamp ISO2852, BS4825 and DIN32676, sizes 1" - 1.1/2" - 2", AISI316, sensor AISI321 polished.
P	Sanitary coupling, nipple, coupling nut DIN11851, sizes DN25 through DN80, AISI316, sensor AISI321 polished.

Measuring range	Sensor type	With pocket tube	Insert length	Sensor diameter	Article
°C			mm	mm	
0 / 100	A10A	Yes	250	12.5	12685789
0 / 100	A10A	Yes	63	15	12725984
0 / 100	A10A	Yes	100	12.5	12337483
0 / 120	A10A	Yes	63	15	12725985
0 / 120	A10A	Yes	100	12.5	12725982
0 / 120	A10A	Yes	250	12.5	12725983
0 / 160	A10A	Yes	63	15	12725986
0 / 160	A10A	Yes	250	12.5	12622462

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Measuring range °C	Sensor type	With pocket tube	Insert length mm	Sensor diameter mm	Article
0 / 160	A10A	Yes	100	12.5	12622459

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.