



GRUNDFOS Inline circulator pump series MAGNA1 stainless steel male thread

The MAGNA1 is a cost-effective and high-performance circulation pump. The pump, equipped with parts being only of important relevance to the performance of its core task, requires little maintenance and has a long service life.

- Easy installation
- Low energy consumption. MAGNA1 pumps meet the requirements of EuP 2013 and 2015
- Nine possible pump settings
- Low noise level.
- Minimal maintenance and a long service life.
- Product range also available for a maximum system pressure of 16 bar.

Characteristics

Series: MAGNA1

Connection: External thread (BSPP)

Material pump casing: Stainless steel

Material quality: 1.4308

Impeller material: Composite material

Quality class of impeller material: PES 30% GF

Frequency: 50/60Hz

Energy efficiency class: IE5

With rotational speed/frequency control: No

Level of protection (IP value): IPX4D [EN 60529]

Insulation class acc. to IEC: F

Double pump: No

Medium temperature: -10 / 110 °C

Ambient temperature: 0 / 40 °C

Application

- Designed for circulating liquids in: Heating systems.
- Air-conditioning and cooling systems.
- Domestic hot-water systems.
- Ground source heat-pump systems.
- Solar-heating systems.

Technical Information

Curve option and control modes:

- Proportional pressure.
- Constant pressure.
- Fixed pump speeds.

•

System pressure:



- The actual inlet pressure and the pump pressure against a closed valve must be less than the maximum permissible system pressure.

Maximum system pressure:

- Is to be found on the pump nameplate.

Sound pressure level:

- Less than 43 dB(A).

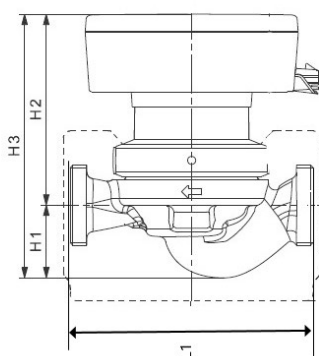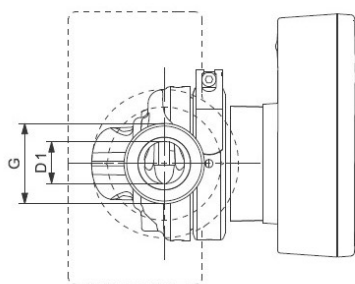

Size table:

Model	L1 mm	H1 mm	H2 mm	H3 mm	G mm	D1 mm
MAGNA1 25-100	180	54	142	196	1.1/2" [40]	25
MAGNA1 25-80	180	54	142	196	1.1/2" [40]	25
MAGNA1 25-60	180	54	142	196	1.1/2" [40]	25
MAGNA1 25-120	180	54	142	196	1.1/2" [40]	25
MAGNA1 25-40	180	54	142	196	1.1/2" [40]	25
MAGNA1 32-120	180	54	142	196	2" [50]	32
MAGNA1 32-60	180	54	142	196	2" [50]	32
MAGNA1 32-100	180	54	142	196	2" [50]	32
MAGNA1 32-80	180	54	142	196	2" [50]	32
MAGNA1 32-40	180	54	142	196	2" [50]	32

Model	Nominal inner diameter	Max. discharge head m	Pressure rating	Electrical connection	Connection voltage	Article
MAGNA1 25-100	1.1/2" [40]	18	PN10	Plug	1 x 230V AC	13643111
MAGNA1 25-80	1.1/2" [40]	18	PN10	Plug	1 x 230V AC	13643119
MAGNA1 25-60	1.1/2" [40]	18	PN10	Plug	1 x 230V AC	13643117
MAGNA1 25-120	1.1/2" [40]	18	PN10	Plug	1 x 230V AC	13643113
MAGNA1 25-40	1.1/2" [40]	18	PN10	Plug	1 x 230V AC	13643115
MAGNA1 32-120	2" [50]	18	PN10	Plug	1 x 230V AC	13643128
MAGNA1 32-60	2" [50]	18	PN10	Plug	1 x 230V AC	13643136
MAGNA1 32-100	2" [50]	18	PN10	Plug	1 x 230V AC	13643123
MAGNA1 32-80	2" [50]	18	PN10	Plug	1 x 230V AC	13643140
MAGNA1 32-40	2" [50]	18	PN10	Plug	1 x 230V AC	13643132

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.