

ECON® Trunnion mounted ball valve Type: 6285 Stainless steel Flange Class 150

Characteristics

Type: 6285
Norm: ASME
Construction type: 2-way
Housing construction: 2-part
Housing material: Stainless steel
Material quality: ASTM A351 CF8M
Connection: Flange
Flange finish: Raised face
Top flange standard: ISO 5211 Direct Mount
Secondary spindle seal material: FPM (FKM)
Tertiary spindle seal material: Graphite
Body seal: SWG 316L/Graphite

Application

- Heavy-duty industrial applications up to 20 bar.
- Liquid and gaseous media.
- Recommended in: Chemicals, tank Storage & AMP, industry.

Technical Information

- Ball valve mounted on pin.
- ASME pressure rating: class 150.
- With top-flange in accordance with ISO 5211 (direct mounting).

Construction

- Two-piece housing construction.
- Full flow capacity.
- Equipped with antistatic design between ball and housing.
- Seats with automatic pressure distribution (single piston effect, SPE).
- Ball supported by bearings.
- Spring-mounted seats.

Approval


- Fire-safe design.

Options

- Can be equipped with pneumatic, electric or hydraulic actuators.
- Position feedback for manual or automated valves.

Size table:

DN	d	L	H	Weight
	mm	mm	mm	kg
8" [200]	201	457	424	218
10" [250]	252	533	439	315
12" [300]	303	610	481	485

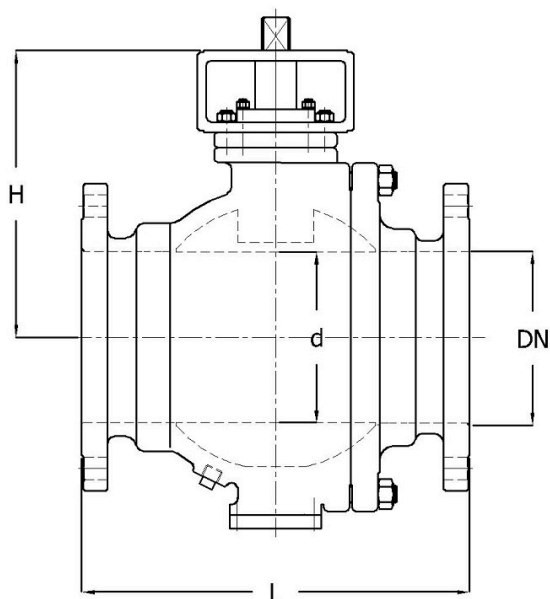

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Nominal inner diameter	Pressure rating	Face to Face norm	Manual operation	Mounting flange	Bore	Material ball	Seat material	Spindle material	Primary spindle seal material	Article
8" [200]	Class 150	ASME B16.10, T1, Series 20	Bare stem	F14	Full bore	ASTM A182 F316	TFM 4215	ASTM 276 S31803 A (F51)	50% SS + 50% PTFE	14460261
8" [200]	Class 150	ASME B16.10, T1, Series 20	Bare stem	F14	Full bore	ASTM A182 F316	TFM 1600	ASTM 276 S31803 A (F51)	50% SS + 50% PTFE	14460258
10" [250]	Class 150	ASME B16.10, T1, Series 20	Bare stem	F16	Full bore	ASTM A182 F316	TFM 4215	ASTM 276 S31803 A (F51)	50% SS + 50% PTFE	14460262
10" [250]	Class 150	ASME B16.10, T1, Series 20	Bare stem	F16	Full bore	ASTM A182 F316	TFM 1600	ASTM 276 S31803 A (F51)	50% SS + 50% PTFE	14460259
12" [300]	Class 150	ASME B16.10, T1, Series 20	Bare stem	F25	Full bore	ASTM A182 F316	TFM 1600	ASTM 276 S31803 A (F51)	50% SS + 50% PTFE	14460260
12" [300]	Class 150	ASME B16.10, T1, Series 20	Bare stem	F25	Full bore	ASTM A182 F316	TFM 4215	ASTM 276 S31803 A (F51)	50% SS + 50% PTFE	14460263

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.